



## **INSTALLATION INSTRUCTIONS**



### **2014-2018 DODGE 2500 4WD 5" RADIUS ARM KIT W/ 4.0 COILOVERS**

**FT23115i**

**Fabtech Motorsports** | 4331 Eucalyptus Ave. Chino, CA 91710

**Tech Line:** 909-597-7800 | **Fax:** 909-597-7185 | **Web:** [www.fabtechmotorsports.com](http://www.fabtechmotorsports.com)

## - PARTS LIST -

K3072DL		
1	FTS23114	COMPONENT BOX 1
1	FTS23115	COMPONENT BOX 2
2	FTS835102	4.0 DLSS COILOVER W/ RESI

FTS23114 COMPONENT BOX 1		
1	FT44172	DODGE PITMAN ARM
1	FT44236BK	TRACK BAR BRACKET
1	FT44518	BUMP STOP MOUNT DRIVER
1	FT44519	BUMP STOP MOUNT PASSENGER
2	FT44279BK	REAR COIL SPRING
1	FT44311BK	UPPER COIL OVER MOUNT (DRIVER)
1	FT44312BK	UPPER COIL OVER MOUNT (PASS)
1	FT44314	ABS RELOCATION BRACKET
1	FT44390BK	RESI MOUNT (DRIVER)
1	FT44391BK	RESI MOUNT (PASS)
1	FT44394BK	UPPER BACKING PLATE (DRIVER)
1	FT44395BK	UPPER BACKING PLATE (PASS)
1	FT44424	HARDWARE SUBASSEMBLY

FTS23115 COMPONENT BOX 2		
2	FT1599-2-4	5" SWAY BAR LINK CLEAR ZINC
1	FT44269BK	REAR TRACK BAR SUPPORT
1	FT44449	RADIUS ARM (DRIVER)
1	FT44450	RADIUS ARM (PASS)
2	FT44268BK	REAR BUMP STOP SPACER
1	FT44269BK	REAR TRACK BAR SUPPORT
1	FT44418	HARDWARE SUBASSEMBLY
1	FT44463	HARDWARE KIT

FT44463 - HARDWARE KIT		LOCATION
	<b>FT44419</b>	
	<b>BAG 1</b>	
4	1/4 SAE WASHER G5 ZINC	
2	1/4-20 NYLOCK NUT	
2	1/4-20 X 1" HEX BOLT	
4	3/8" SAE WASHER	
2	3/8-16 X 1-1/4" HEX BOLT	
2	3/8-16 C-LOCK NUT	
2	7/16 USS WASHER G8	
2	7/16 SPLIT LOCK WASHER	
9	7/16-14 C-LOCK NUT	
1	7/16-14 X 1-1/4 HEX BOLT G8	
10	7/16-14 X 1-1/2 HEX BOLT G8	
6	5/8 SAE WASHER	
2	5/8-11 C-LOCK NUT	
2	5/8-11 X 3-1/4 HEX BOLT G8	
2	5/8-11 X 4 SOCKET HD BOLT	
	<b>BAG 2</b>	
1	M18-2.5 X 90MM HEX BOLT	TRACK BAR DROP BRACKET
2	M18 WASHERS	
1	NUT C-LOCK 18MM G10.9 ZINC	
2	1/2-13 X 1-1/4 HEX BOLT G8 ZNC	BUMP STOP
8	1/2 SAE WASHER G8 ZINC	
6	1/2-13 C-LOCK NUT ZINC	
2	1/2-13 X 1-1/2 HEX BOLT G8 ZNC	TRACK BAR DROP BRACKET
4	1/2 SAE WASHER G8 ZINC	
2	5/16-18 X 2-1/2 HEX BOLT G8 ZINC	BUMP STOP
4	5/16 SAE WASHER G8 ZINC	
2	5/16-18 C-LOCK NUT ZINC	
4	1/4-20 X 1 HEX BOLT G5 ZINC	BRAKE LINE EXTENSION
2	1/4 SAE WASHER G5 ZINC	
2	1/4-20 C-LOCK NUT ZINC	
2	5/16-18 X 2-1/2" HEX BOLT	
	<b>BAG 3</b>	
4	7/16-14 X 1-1/4 HEX BOLT G8 ZC	REAR BUMP STOP
8	7/16 SAE WASHER G8 ZINC	
4	7/16-14 C-LOCK NUT ZINC	
8	1/2 USS WASHER G5 ZINC	SWAY BAR LINK
4	M12-1.75 X 70MM HEX BOLT G10.9	
4	NUT 12-1.75 NYLOK 10.9 Z1	
1	1/4-20 X 1 HEX BOLT G8 ZINC	REAR END BREATHER
2	1/4 SAE WASHER G5 ZINC	
1	1/4-20 NYLOCK NUT ZINC	
1	CUSHIONED CLAMP	

2	1/4-28 GREASE FITTING	
	<b>BAG 4</b>	
1	5/16-18 X 1" SELF TAPPING SCREW	
5	7/16-14 X 1-1/4 HEX BOLT G8 ZC	REAR COIL SPACER/REAR TRACK BAR DROP BRACKET
10	7/16 SAE WASHER G8 ZINC	
5	7/16-14 C-LOCK NUT ZINC	
1	1/2-13 X 1-1/4 HEX BOLT G8 ZNC	REAR TRACK BAR BRACKET
1	1/2-13 X 2-1/4 HEX BOLT G8 ZNC	
4	1/2 SAE WASHER G8 ZINC	
2	1/2-13 C-LOCK NUT ZINC	
1	9/16-18 X 4 HEX BOLT G8 ZC	
2	9/16 SAE WASHER G8 ZINC	
1	9/16" -18 C LOCK NUT	
2	THREAD LOCKING COMPOUND 2 MIL	
<b>FT44452 - HARDWARE KIT</b>		
2	1/4-20 X 2-1/2" HEX BOLT	BUMPSTOP
4	1/4" SAE WASHER	
2	1/2-20 NYLOCK NUT	

<b>FT44424      HARDWARE SUBASSEMBLY</b>		
1	FT44381	LOWER SHOCK MOUNT TAB DRIVER OUTER
1	FT44382	LOWER SHOCK MOUNT TAB DRIVER INNER
1	FT44383	LOWER SHOCK MOUNT TAB PASS OUTER
1	FT44384	LOWER SHOCK MOUNT TAB PASS INNER
1	FT44385	LOWER SHOCK MOUNT SPACER TOOL
1	FT44386	LOWER SHOCK GUSSET TOP DRIVER
1	FT44387	LOWER SHOCK GUSSET TOP PASS

<b>FT44418      HARDWARE SUBASSEMBLY</b>		
2	FTSP01029	HARDWARE PACK STEM BUSHING
2	FT86021	HARDWARE & BUSHING KIT 21
4	FT83076	1.5/1.75-2.25/2.5 RESI URETHANE
4	FT89016	#48 HOSE CLAMP 2-9/16" - 3-1/2"
1	FT605	SLEEVE 1.000 X .563 X 1.855
1	FT606	SLEEVE .750 X .515 X .780
8	FT1004	SWAY BAR LINK BUSHING HALF
2	FT44135	BUMP STOP MOUNT TAB
2	FT44245	BRAKE LINE EXT
1	FT44246	TRACK BAR SUPPORT SPACER
2	FT44258	1/4 NUT TAB
4	FT404739	SWAY BAR LINK SLEEVE
1	FT44270	NUT TAB
1	FT50184	TRAC BAR SUPPORT NUT TAB
1	FTAS16	DRIVER WARNING DECAL
1	FTAS12	STICKER FT BLUE 10X4
1	FTREGCARD	REGISTRATION CARD
1	FT23115i	INSTRUCTIONS
4	FT1006	BUSHING LOWER
2	FT102	SLEEVE 1.000 X .732 X 3.280
2	FT44045	TRACK BAR NUT TAB
1	FT44388	NUT TAB UPPER
2	FT44389	NUT TAB
1	FT44408	SLEEVE 1.00 X .625 X 2.035

## - TOOL LIST -

### ***Required Tools (Not Included)***

- |  |                |
|--|----------------|
| -Basic Hand Tools                                      | -Torque Wrench |
| -Floor Jack  | -Jack Stands   |
| -Assorted Metric and S.A.E sockets, and Allen wrenches | -Welder        |
| -Die Grinder w/ Cutoff Wheel or Sawzall                |                |

## - PRE-INSTALLATION NOTES -

For technical assistance call: **909-597-7800** or e-mail: **info@fabtechmotorsports.com**

### ***Read this before you begin installation-***

Check all parts to the parts list above before beginning installation. If any parts are missing contact Fabtech at 909-597-7800 and a replacement part will be sent to you immediately.

Read all instructions thoroughly from start to finish before beginning the installation. If these instructions are not properly followed severe frame, driveline and / or suspension damage may occur.

Check your local city and state laws prior to the installation of this system for legality. Do not install if not legal in your area.

Prior to the installation of this suspension system perform a front end alignment and record. Do not install this system if the vehicle alignment is not within factory specifications. Check for frame and suspension damage prior to installation.

The installation of this suspension system should be performed by two professional mechanics.

This suspension must be installed with Fabtech shock absorbers.

Installation of all fasteners requires the use of provided thread locking compound with proper torque values as indicated throughout the installation. Apply thread locking compound upon the final torque of the fastener.

**WARNING-** Installation of this system will alter the center of gravity of the vehicle and may increase roll over as compared to stock.

Vehicles that receive oversized tires should check ball joints, uniballs, tie rods ends, pitman arm and idler arm every 2500-5000 miles for wear and replace as needed.

Verify differential fluid is at manufactures recommended level prior to kit installation. Installation of the kit will reposition the differential and the fill plug hole may be in a different position. (For example, if the manufacture recommends 3 quarts of fluid, make sure the diff has 3 quarts of fluid). Check your specific manual for correct amount of fluid.

### ***RECOMMENDED TIRE/WHEEL SIZES -***

Use 37x12.50/R17 tire w/ 17x9 wheels w/ 5" BS w/ minor trimming

Use 37x12.50/R18 tire w/ 18x9 wheels w/ 5" BS w/ minor trimming

Use 37x13.50/R20 tire w/ 20x9.5 wheels w/ 5" BS w/ minor trimming

Use 37x13.50/R22 tire w/ 22x11 wheels w/ 5" BS w/ minor trimming

### ***FOOTNOTES -***

- Does not fit power wagon models



## - INSTRUCTIONS -

### FRONT SUSPENSION

1. Disconnect the negative terminal on the battery. Jack up the front end of the truck and support the frame rails with jack stands. **NEVER WORK UNDER AN UNSUPPORTED VEHICLE!** Remove the front tires.
2. **DRIVER SIDE ONLY** - Starting on the driver side, remove the driver side fender liner.
3. Remove the factory shock and discard. Retain factory lower hardware.
4. Disconnect factory sway bar links.
5. Remove factory coil spring and rubber isolator. Retain these parts for later use.
6. Remove the factory pitman arm and discard. Keep hardware.
7. Locate the new FT44172 Fabtech pitman arm and install. Do not reconnect the factory drag link at this time. Reinstall the factory lock washer plus thread locker. Torque to 220ft-lbs.
8. Unthread the factory drag link at the adjuster sleeve and remove adjuster sleeve. **SEE FIGURE 1**

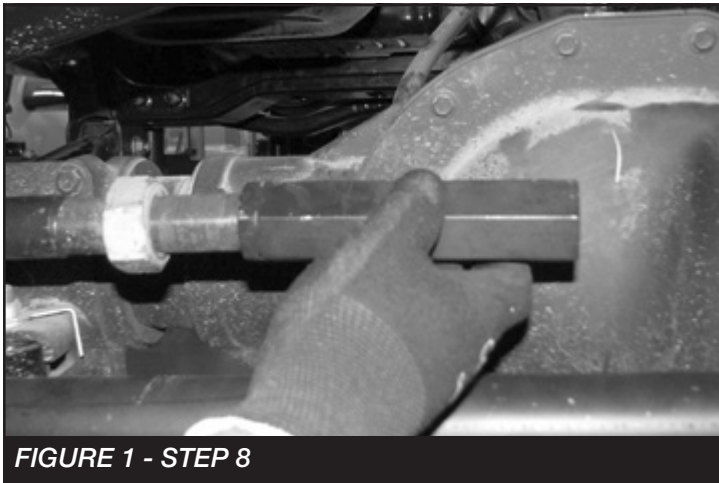


FIGURE 1 - STEP 8

9. Using a die grinder remove the flat nonthreaded section from both ends of the drag link. This will allow you to rotate the drag link and line it up with the pitman arm. **SEE FIGURES 2-4**



FIGURE 2 - STEP 9

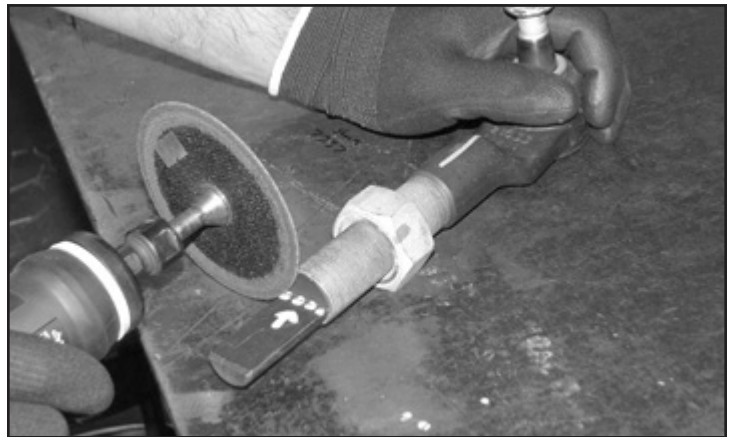


FIGURE 3 - STEP 9



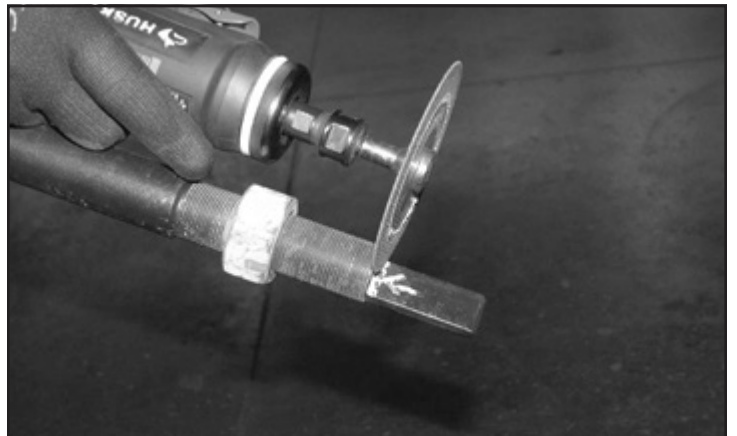


FIGURE 4 - STEP 9

10. Reassemble the drag link and connect it to the new pitman arm. **SEE FIGURE 5**

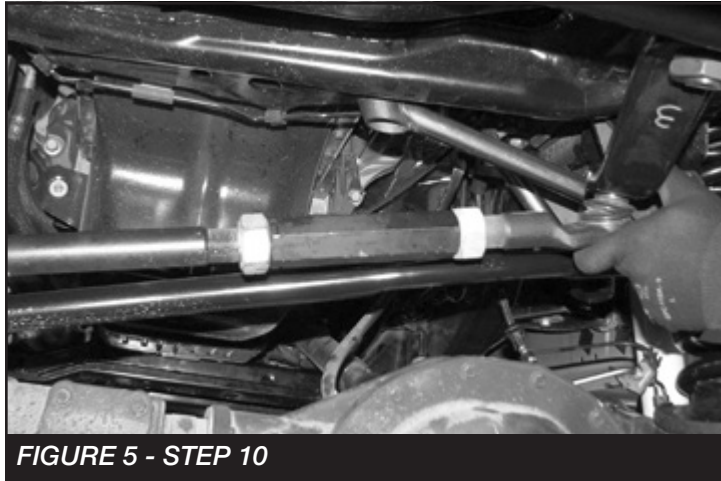


11. Torque the drag link to 83 ft-lbs.
12. Remove the track bar from the frame side of the vehicle.
13. Locate the FT44236BK track bar bracket and M18-2.5 x 90mm bolt.
14. Slide the track bar bracket into the factory mount and insert the M18 bolt into the factory pivot hole. **SEE FIGURE 6**

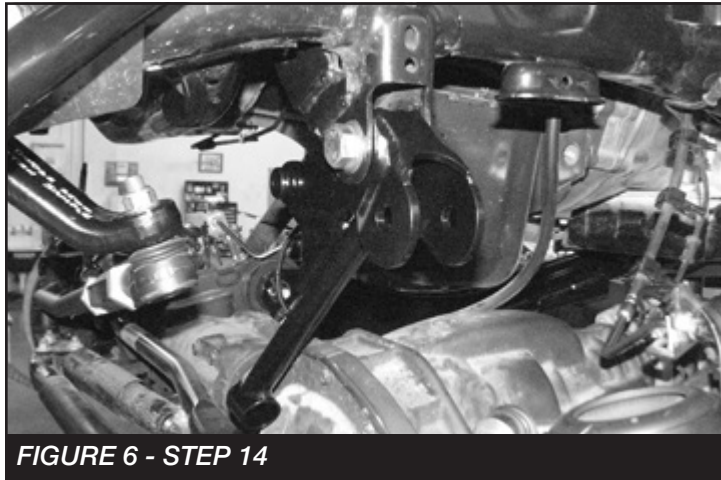


15. Rotate the bracket up until the end of the bracket is flush with the crossmember under the motor.
16. Using the Fabtech bracket as a guide, mark the factory mount for the upper driver side mounting hole.

17. Swing the bracket back out of the way. Using a 1/2" drill bit, drill out the marked hole. **SEE FIGURE 7**

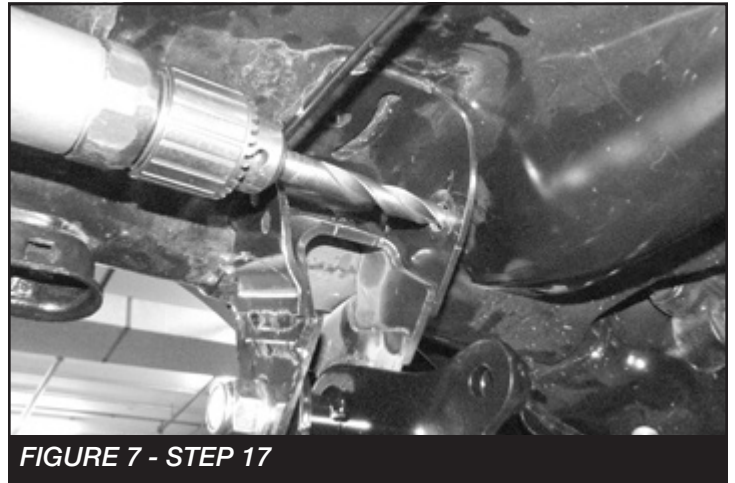

18. Locate one FT44246 sleeve and two 1/2"-13 x 1-1/2" bolts, nuts and washers.
19. Rotate the track bar bracket back into place and bolt together using 1/2"-13 x 1-1/2" bolt and the sleeve. **SEE FIGURES 8-9**

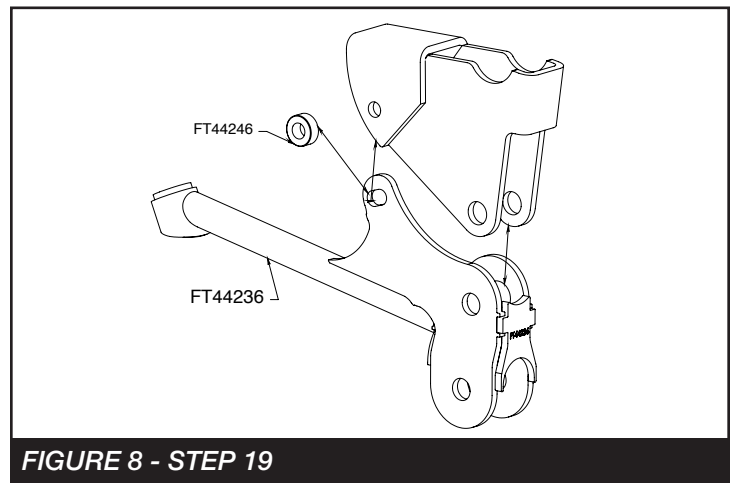

20. Using the Fabtech bracket as a guide, drill a 1/2" hole in the cross member under the motor. Next, mount using 1/2"-13x1.5" and washer. **SEE FIGURE 10**





**FIGURE 10 - STEP 20**

21. Remove the factory coil springs and lower rubber isolators. **SEE FIGURE 11**




**FIGURE 11 - STEP 21**

- **IF INSTALLING DIRT LOGIC 4.0 COILOVERS REFER TO THE COILOVER CONVERSION INSTRUCTIONS AT THIS TIME.**

22. Remove and save the factory rubber bump stop. **SEE FIGURE 12.** Insert the factory rubber bumpstop into the new Fabtech bumpstop bracket (FT44518). Using a 1/4" drill, drill a hole through the factory rubber bumpstop using the new bracket as a guide. Then install the supplied 1/4" X 2-1/2" hardware. Torque to 14 ft-lbs. **SEE FIGURE 13**




**FIGURE 12 - STEP 22**

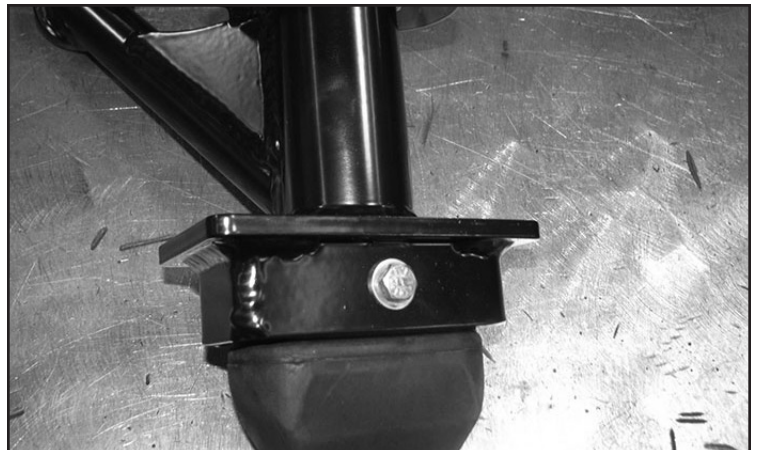

**FIGURE 13 - STEP 22**

23. Using a die grinder, grind out the stamped in tabs on the inside of the bump stop housing. **SEE FIGURES 14-15**

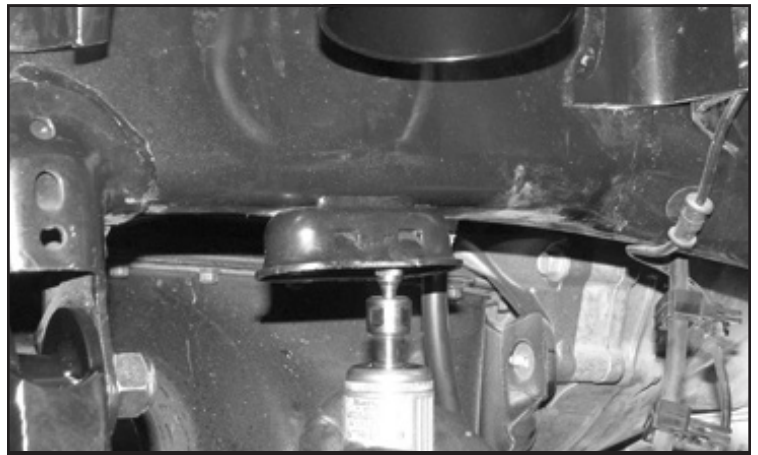


**FIGURE 14 - STEP 23**



**FIGURE 15 - STEP 23**

24. Using a 1/2" drill bit, drill out the hole in the factory crossmember inline with the factory bump stop mount. **SEE FIGURE 16**

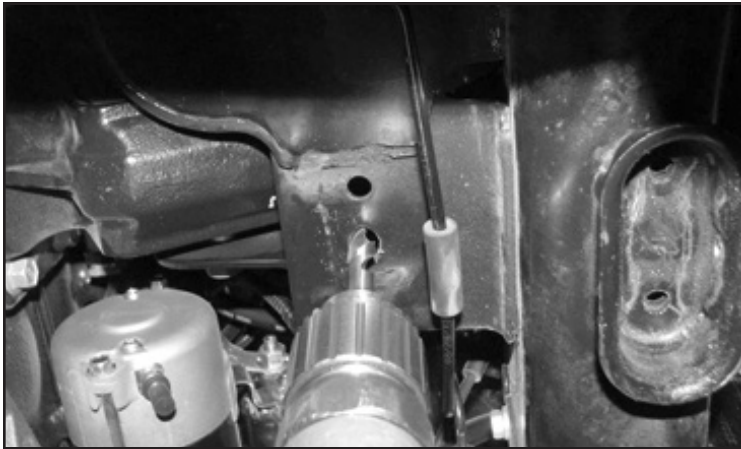

**FIGURE 16 - STEP 24**

25. Slide the bump stop into the factory bump stop mount. Using a 1/2"-13 x 1-1/4" bolt and the FT44135 (nut tab), bolt the bump stop to the crossmember. Torque the 1/2" bolt to 90 ft-lbs. **SEE FIGURES 17-19**



**FIGURE 17 - STEP 25**




**FIGURE 18 - STEP 25**




**FIGURE 19 - STEP 25**

26. Using the outer tab on the bump stop as a drill guide, drill a 5/16" hole all the way through the factory bump stop mount. **SEE FIGURE 20**

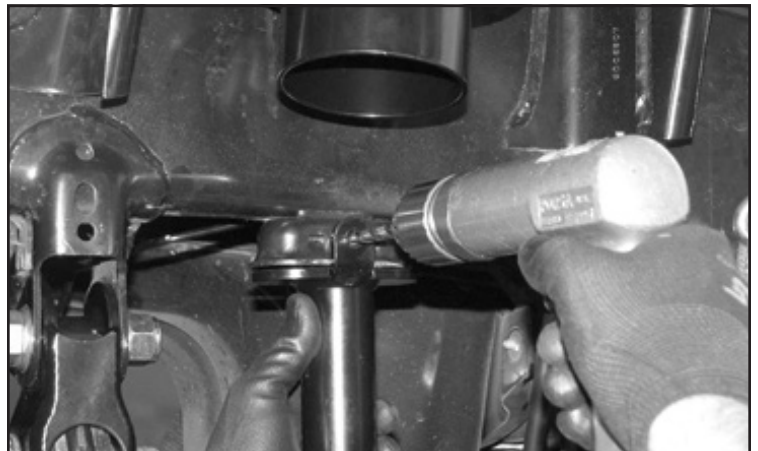

**FIGURE 20 - STEP 26**

27. Locate a 1/4" x 2-1/2" bolt, nut and washers. Using this bolt, secure the bump stop to the factory bump stop mount and torque to 29 ft-lbs. **SEE FIGURE 21**

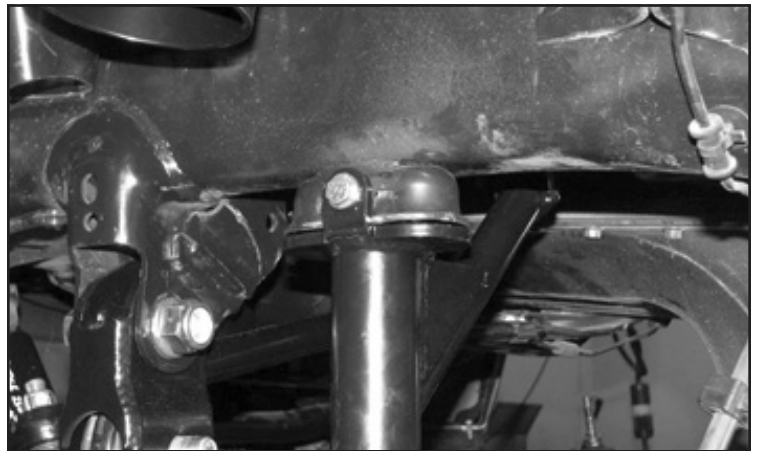


**FIGURE 21 - STEP 27**


28. Repeat steps 2-27 on the passenger side.



29. Secure the front diff. Remove the factory driver and passenger side Radius arm. Retain Hardware.  
**SEE FIGURES 22-23**

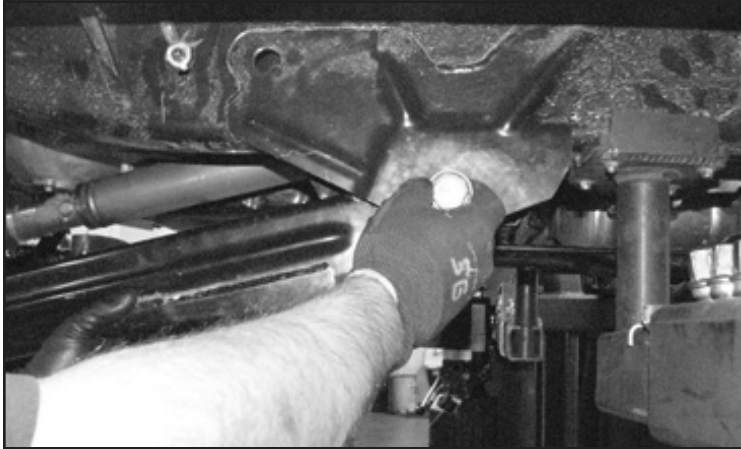


**FIGURE 22 - STEP 29**

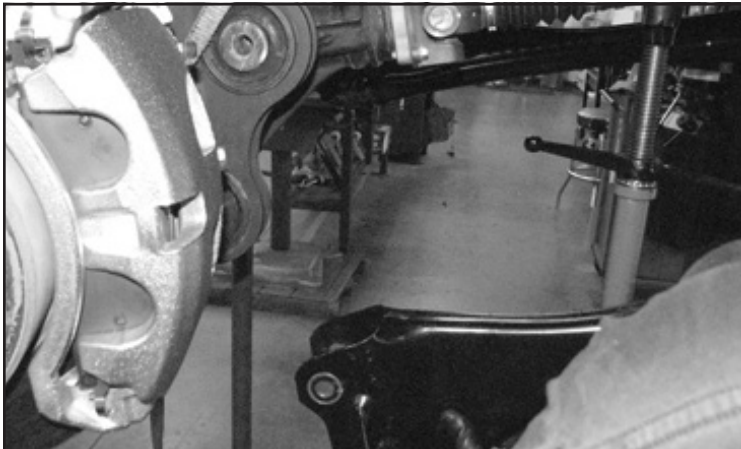


**FIGURE 23 - STEP 29**

30. Locate the FT44449 Driver side radius arm, FT1006 bushing, FT102 sleeve, and zerk fitting.

31. Install two bushings, one sleeve, and the zerk fitting into the barrel of the radius arm. **SEE FIGURES 24-26**

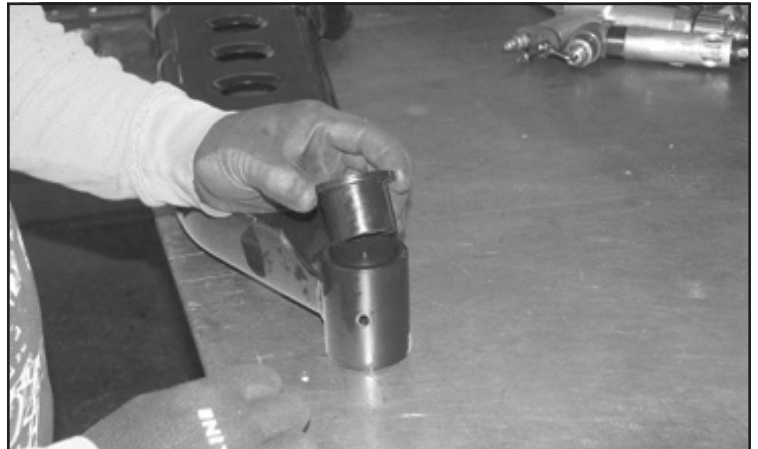

**FIGURE 24 - STEP 31**

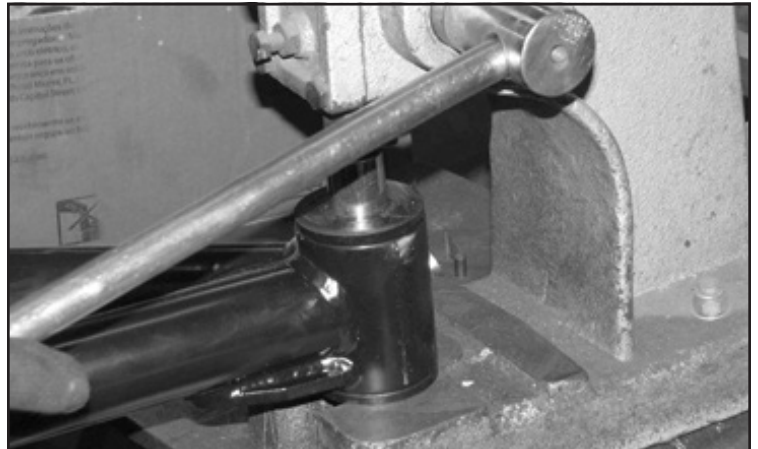

**FIGURE 25 - STEP 31**



**FIGURE 26 - STEP 31**

32. Install the new Fabtech radius arms into the factory frame pocket and onto the axle bushings using the factory hardware. Torque the factory bolts to 200 ft-lbs.


**SEE FIGURES 27-29**



**FIGURE 27 - STEP 32**



**FIGURE 28 - STEP 32**

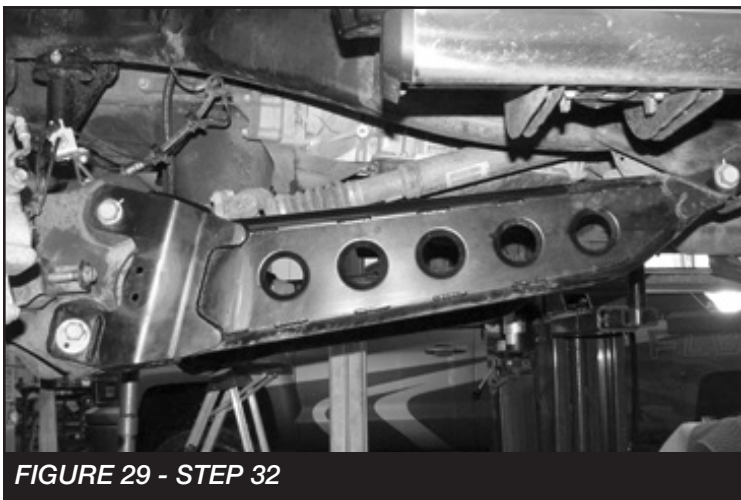

**FIGURE 29 - STEP 32**

33. Locate the FT44245 Brake line extension, FT44258 nut tab and two 1/4"-20 x 1" bolts. Attach the brake line extension to the axle using one bolt and the nut tab. Attach the factory brake line bracket to the Fabtech extension. Torque to 10 ft-lbs. Repeat this step on the passenger side. **SEE FIGURES 30-32**



**FIGURE 30 - STEP 33**



**FIGURE 31 - STEP 33**



**FIGURE 32 - STEP 33**

34. Reconnect the factory sway bar. Torque to 29 ft-lbs.



### 35. REAR SUSPENSION

36. Jack up the rear end of the vehicle and support the frame rails with jack stands and remove wheels and tires. Remove the rear driver and passenger inner fender liners. **SEE FIGURE 33**



**FIGURE 33 - STEP 36**

37. Disassemble the rear track bar from the axle side and keep hardware for re-installation. Remove and discard factory sway bar end links and shocks, save lower shock hardware for re-installation. Slowly lower the rear axle and remove and save the rear factory springs and rubber isolators for re-installation. Remove bump stops and hardware from the vehicles frame and keep for re-installation.
38. Locate the hole on the front side of the rear drivers side axle bump stop pad. Drill out this hole to 7/8". **SEE FIGURES 34-35**



**FIGURE 34 - STEP 38**



FIGURE 35 - STEP 38

39. Next, on the rear side of the same bump stop pad. Remove the factory brake line bracket and relocate it  $\frac{3}{4}$ " - left and  $1\frac{1}{4}$ " down using a  $\frac{17}{64}$ " bit. Drill another  $\frac{17}{64}$ " hole  $\frac{5}{8}$ " below to allow the factory bracket to set in. **NOTE: ONLY DRILL THROUGH BUMP STOP PAD, DRILLING TO FAR WILL RESULT IN DAMAGE TO AXEL TUBE. SEE FIGURES 36-37**



FIGURE 36 - STEP 39

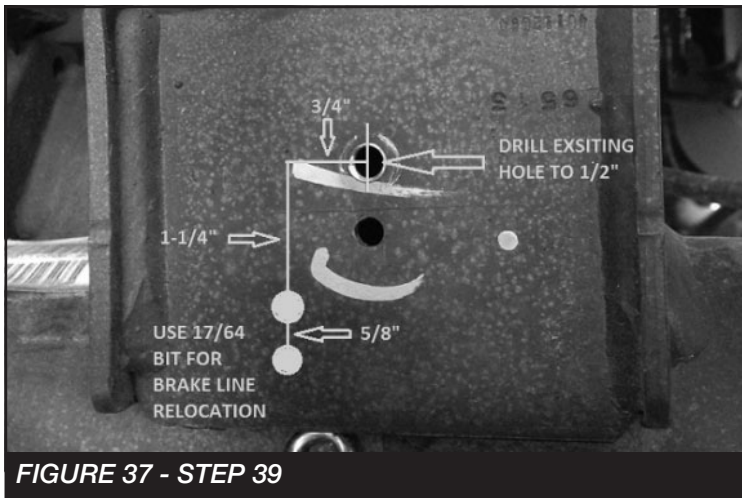


FIGURE 37 - STEP 39

40. Next, using a  $\frac{1}{2}$ " bit, drill the old brake line bracket hole to allow for the new track bar support bracket in a future step. **SEE FIGURE 38**

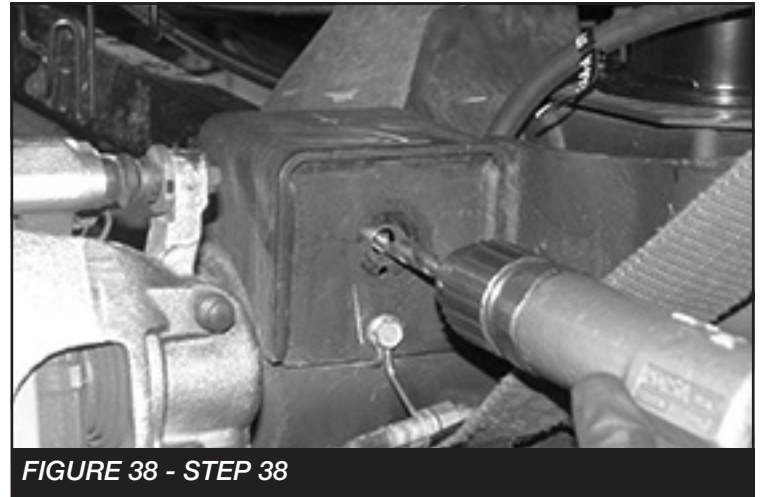


FIGURE 38 - STEP 38

41. Locate the FT44269BK rear track bar support bracket. TRIMMING MAY BE REQUIRED TO INSTALL THE NEW FT44269BK REAR TRACK BAR SUPPORT BRACKET. **SEE FIGURE 39**


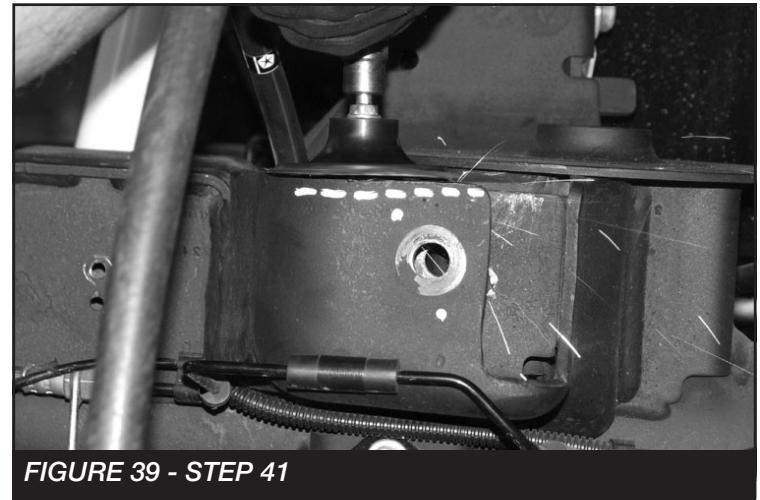



FIGURE 39 - STEP 41



- 42. NOTE: If installing on 2017 or newer skip to step 45.**  
Install the FT44269BK using the factory track bar bolt.  
Mark holes for drilling on the factory track bar bracket.  
Remove the bolt and drill out the hole on the factory track bar bracket using a 1/2" drill bit. **SEE FIGURES 40-42**

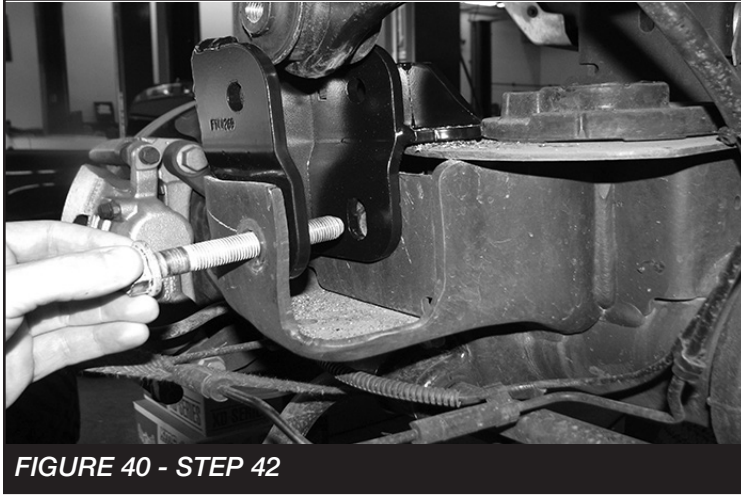

**FIGURE 40 - STEP 42**

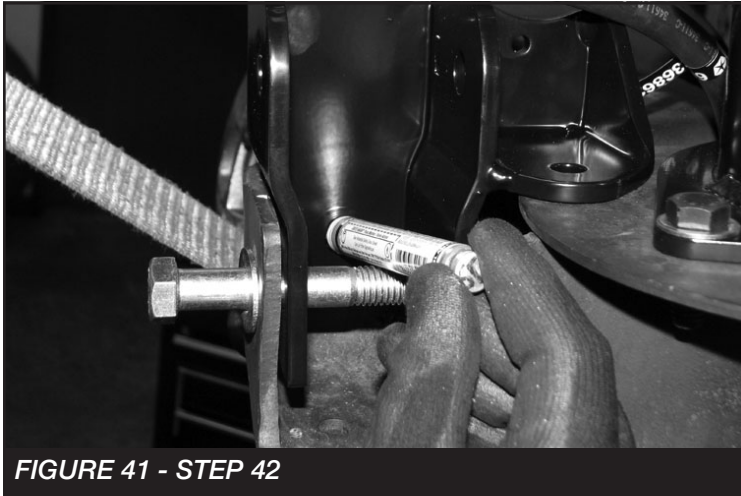


**FIGURE 41 - STEP 42**




**FIGURE 42 - STEP 42**

43. Install the supplied 1/2"-13x 2-1/4" bolt, nut, washers and FT606 sleeve as shown below. **DO NOT TIGHTEN.**  
**SEE FIGURES 43-44**

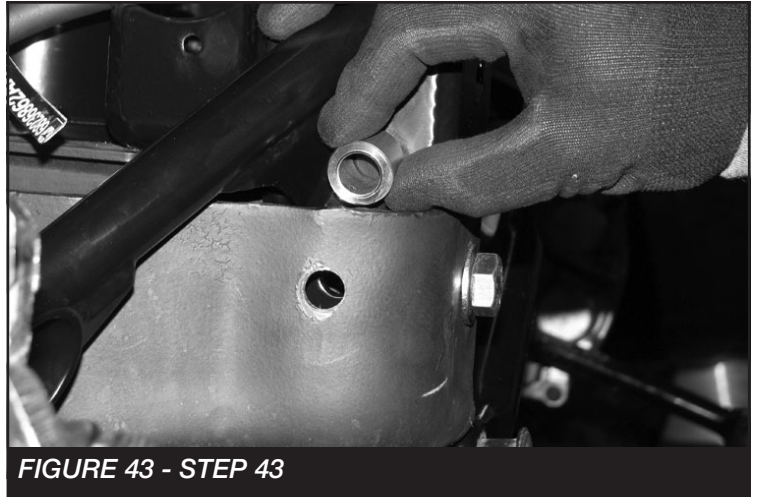


**FIGURE 43 - STEP 43**

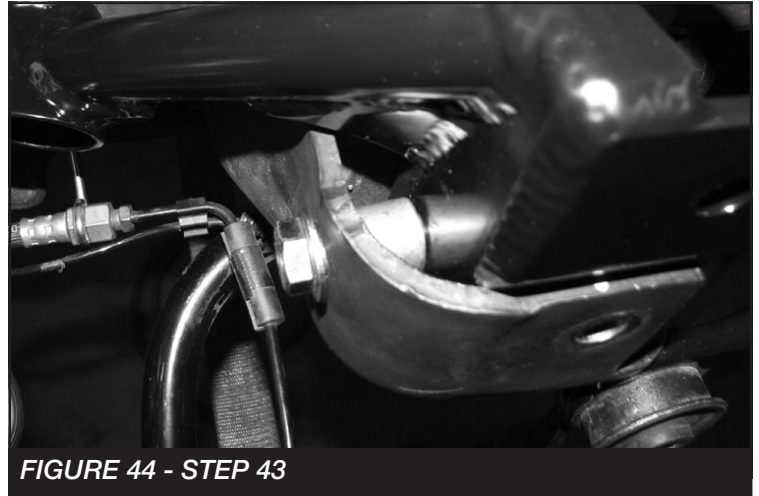


**FIGURE 44 - STEP 43**

44. Install the factory track bar pivot bolt and hardware along with FT605 Sleeve. Torque to 160 ft-lbs. Next, torque the 1/2" bolt on the same bracket to 127 ft-lbs.  
**SEE FIGURES 45-46**

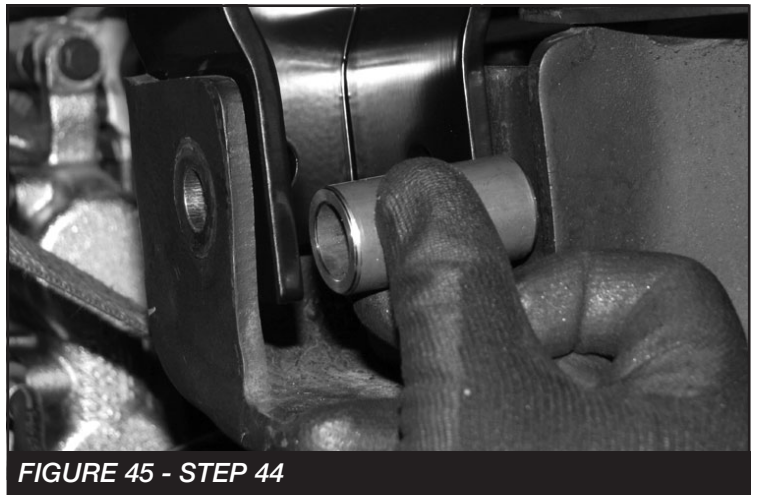

**FIGURE 45 - STEP 44**

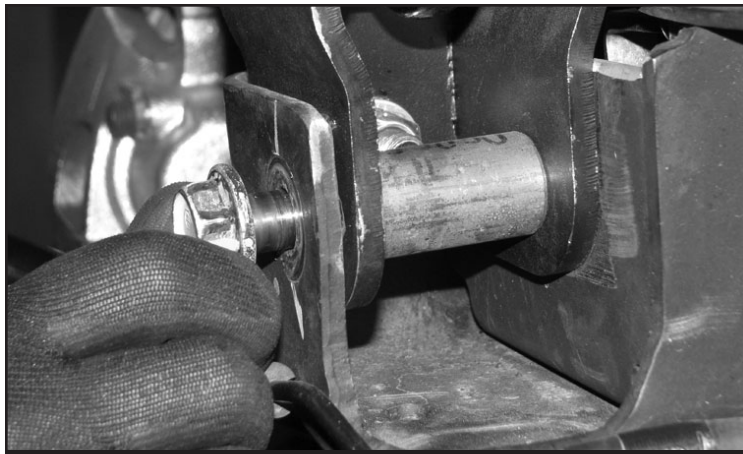

**FIGURE 46 - STEP 44**

45. Locate FT44270 nut tab,  $\frac{1}{2}$ "-13x 1-1/4" bolt and washer and install into the track bar support bracket through the bump stop pad. Torque to 127 ft-lbs.  
**SEE FIGURES 47-49**



**FIGURE 47 - STEP 45**



**FIGURE 48 - STEP 45**




**FIGURE 49 - STEP 45**

46. Using a  $\frac{7}{16}$ " drill bit, drill through the existing hole on the track bar bracket into the top of the spring perch.  
**SEE FIGURE 50**



**FIGURE 50 - STEP 50**

47. Locate and install the supplied  $\frac{7}{16}$ "-14x 1-1/4" bolt, washer and FT50184 Track Bar Support Nut Tab. Torque to 83 ft-lbs. **SEE FIGURES 51-52**

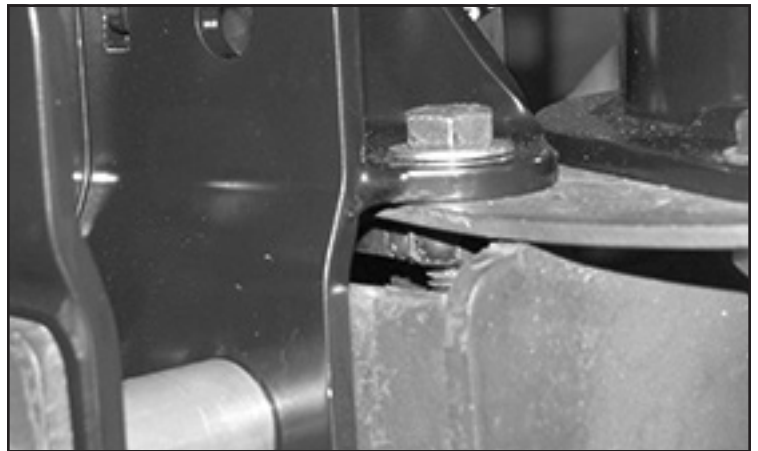

**FIGURE 51 - STEP 47**





FIGURE 52 - STEP 47

48. Locate the supplied  $\frac{1}{4}$ "-20x 1" bolt, nut, washers and FTCLAMP-LB10 rubber cushioned clamp and install on the rear axle breather tube, mounting it to the hole provided on the new track bar bracket. Torque to 14 ft-lbs. **SEE FIGURE 53**

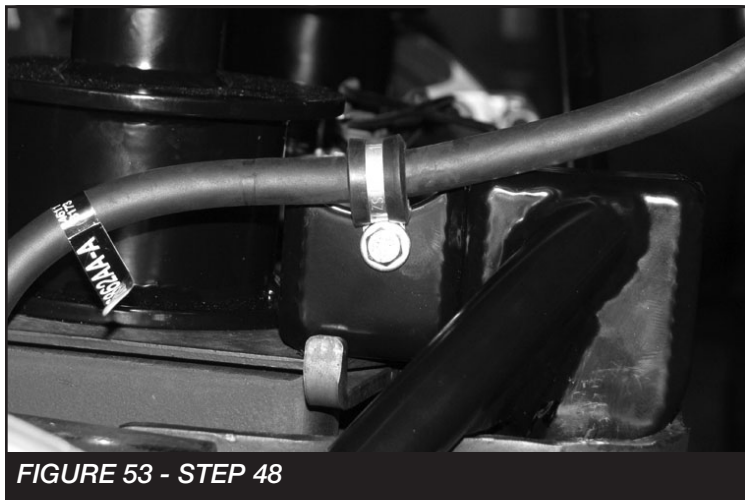


FIGURE 53 - STEP 48

49. Locate the FT44268BK rear bump stop spacer and supplied  $\frac{7}{16}$ "-14x 1- $\frac{1}{4}$ " bolts, nuts, and washers. Install the FT44268BK spacer with the factory bolts that were removed during disassembly. Then, install the factory bump stop onto the spacer bracket with the supplied  $\frac{7}{16}$ " hardware. Torque to 58 ft-lbs. **SEE FIGURE 54**

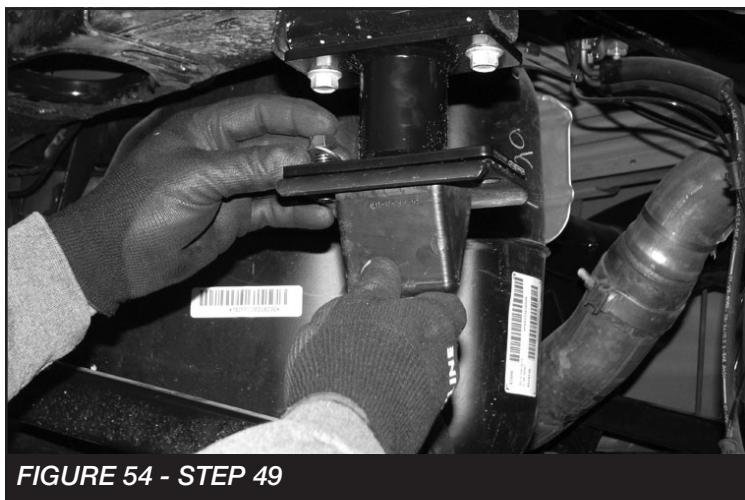


FIGURE 54 - STEP 49

50. Locate and Install (FT44279BK) Fabtech rear spring using the factory rubber isolators as shown. **SEE FIGURE 55**

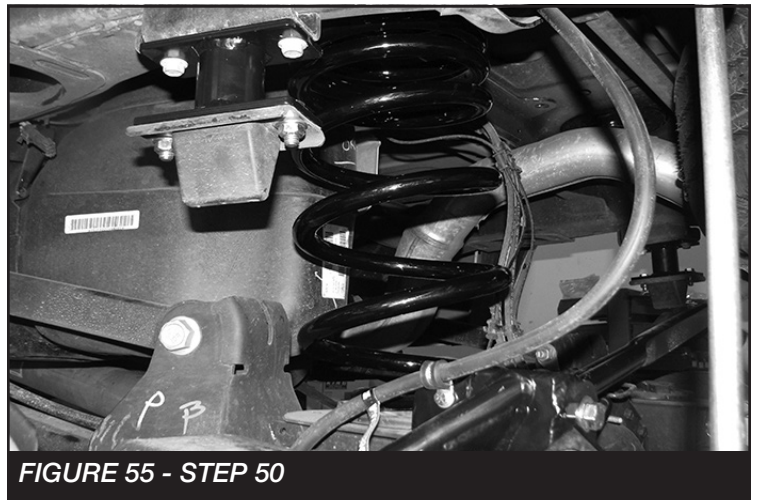


FIGURE 55 - STEP 50

51. Locate the supplied  $\frac{9}{16}$ "-18x 3- $\frac{1}{2}$ " bolt, nut and washers and install the rear track bar into the new location. Torque to 184 ft-lbs. **SEE FIGURE 56**

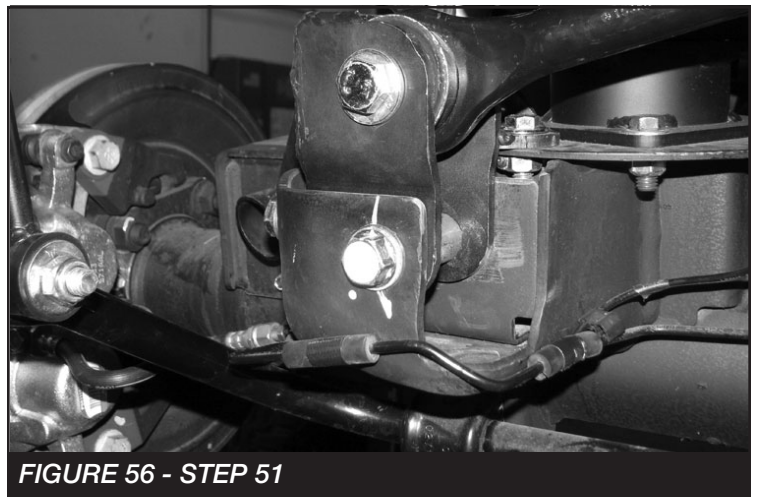


FIGURE 56 - STEP 51

52. Locate the FT1599-2-4 (5" zinc sway bar links) and supplied M12-1.75 x 70mm bolts, Nylok nuts and washers. Install the supplied bushings and sleeves. **SEE FIGURES 57-58**




**FIGURE 57 - STEP 52**




**FIGURE 58 - STEP 52**

53. Install the new end links with the supplied M12-1.75 x 70mm bolts, Nylok nuts and washers and torque to 100 ft-lbs. **SEE FIGURES 59-60**

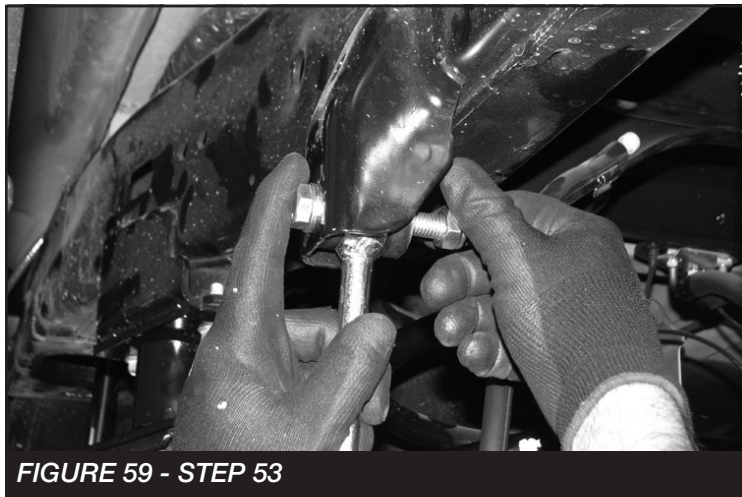


**FIGURE 59 - STEP 53**

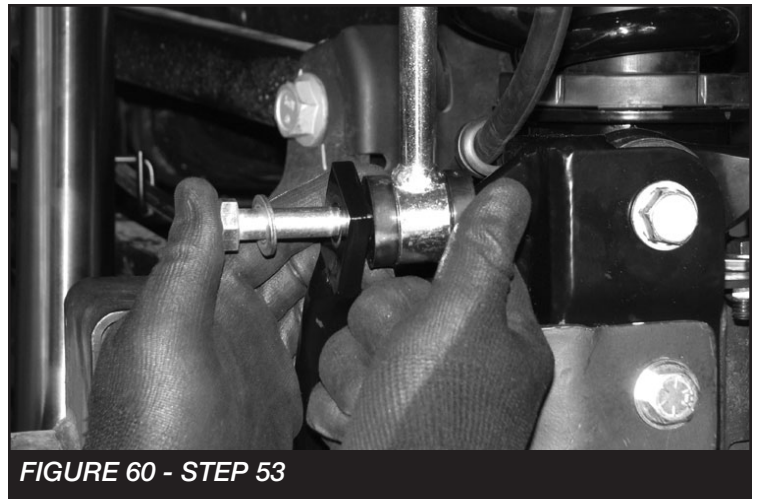

**FIGURE 60 - STEP 53**

54. Locate the rear shocks that were supplied with the kit: (FTS811042- Dirt Logic 2.25 Shock)
55. Press the supplied sleeve into the lower bushing and install the rear shocks with the supplied washers and bushings. Next, torque the upper nut to 14 ft-lbs and the lower to 37 ft-lbs. **SEE FIGURES 61-62**

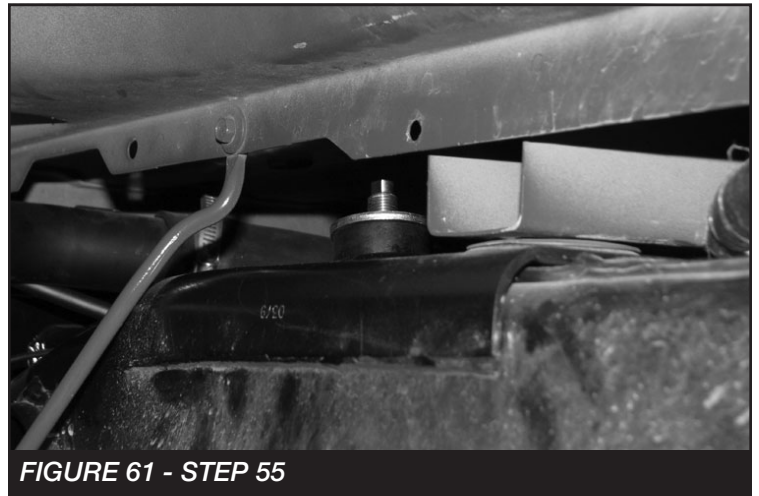

**FIGURE 61 - STEP 55**



**FIGURE 62 - STEP 55**



56. Re-Install both front and rear inner fender liners.
57. Install tires and wheels and torque lug nuts to wheel manufacturer's specifications. Turn front tires left to right and check for appropriate tire clearance. **Note - Some oversized tires may require trimming of the front bumper & valance.**
58. Check front end alignment and set to factory specifications. Readjust headlights.
59. Recheck all bolts for proper torque.
60. Recheck brake hoses, ABS wires and suspension parts for proper tire clearance while turning tires fully left to right.
61. Check the fluid in the front and rear differential and fill if needed with factory specification differential oil. **Note - some differentials may expel fluid after filling and driving. This can be normal in resetting the fluid level with the new position of the differential/s.**
62. Install Driver Warning Decal. Complete product registration card and mail to Fabtech in order to receive future safety and technical bulletins on this suspension.

**Vehicles that will receive oversized tires should check ball joints, uniballs and all steering components every 2500-5000 miles for wear and replace as required.**

**RE-TORQUE ALL NUTS, BOLTS AND LUGS  
AFTER 50 MILES AND PERIODICALLY  
THEREAFTER.**

For technical assistance call: **909-597-7800**

## - Product Warranty and Warnings -

Fabtech provides a Limited Lifetime Warranty to the original retail purchaser who owns the vehicle, on which the product was originally installed, for defects in workmanship and materials.

The Limited Lifetime Warranty excludes the following Fabtech items; bushings, bump stops, ball joints, tie rod ends, limiting straps, cross shafts, heim joints and driveshafts. These parts are subject to wear and are not considered defective when worn. They are warranted for 60 days from the date of purchase for defects in workmanship.

Dirt Logic and Performance Coilover take apart shocks are considered a serviceable shock with a one year warranty on leakage only. Service seal kits are available separately for future maintenance. All other shocks are covered under our Limited Lifetime Warranty.

Fabtech does not warrant any product for finish, alterations, modifications and/or installation contrary to Fabtech's instructions. Alterations to the finish of the parts including but not limited to painting, powder coating, plating and/or welding will void all warranties. Some finish damage may occur to parts during shipping, which is considered normal and is not covered under warranty.

Fabtech products are not designed nor intended to be installed on vehicles used in race applications or for racing purposes or for similar activities. (A "RACE" is defined as any contest between two or more vehicles, or any contest of one or more vehicle against the clock, whether or not such contest is for a prize). This warranty does not include coverage for police or taxi vehicles, race vehicles, or vehicles used for government or commercial purposes. Also excluded from this warranty are sales outside of the United States of America.

Installation of most suspension products will raise the center of gravity of the vehicle and will cause the vehicle to handle differently than stock. It may increase the vehicle's susceptibility to a rollover, on road and off road, at all speeds. Extreme care should be taken to operate the vehicle safely at all times to prevent rollover or loss of control resulting in serious injury or death. Fabtech front end Desert Guards may impair the deployment or operation of vehicles equipped with supplemental restraining systems/air bag systems and should not be installed if the vehicle is equipped as so.

Fabtech makes every effort to ensure suspension product compatibility with all vehicles listed on the website, but due to unknown auto manufacturer's production changes and/or inconsistencies by the auto manufacturer, Fabtech cannot be responsible for 100% compatibility, including the fitment of tire and wheel sizes listed. The Tire and Wheel sizes listed in Fabtech's website are only a guideline for street driving with noted fender trimming. Fabtech is not responsible for damages to the vehicle's body or tires. Fabtech is not responsible for premature wear of factory components due to the installation of oversized tires and wheels.

Fabtech's obligation under this warranty is limited to the repair or replacement, at Fabtech option, of the defective product only. All costs of removal, installation or re-installation, freight charges, incidental or consequential damages are expressly excluded from this warranty. Fabtech is not responsible for damages and/or warranty of other vehicle parts related or non related to the installed Fabtech product. This warranty is expressly in lieu of all other warranties expressed or implied. This warranty shall not apply to any product that has been subject to accident, negligence, alteration, abuse or misuse as determined by Fabtech.

Fabtech suspension components must be installed as a complete system including shocks as shown on our website. All warranties will become void if Fabtech parts are combined and/or substituted with other aftermarket suspension products. Combination and/or substitution of other aftermarket suspension parts may cause premature wear and/or product failure resulting in an accident causing injury or death. Fabtech does not warrant products not manufactured by Fabtech.

Depending on the condition of the factory suspension components retained after the installation of a Fabtech suspension not all vehicles may have the same ride stance front to rear as described in the website. The blue color of suspension components shown in all Fabtech photographs are for display purposes only. Majority of all Fabtech components will be black specifically where noted with part numbers ending in BK.

Installation of Fabtech product may void the vehicles factory warranty; it is the consumer's responsibility to check with their local vehicle's dealer for warranty disposition before the installation of the product. Some state laws may prohibit modification of suspension to a vehicle in whole or in part. It is the responsibility of the installer and consumer to consult local laws prior to the installation of any Fabtech suspension product to comply with such written laws.

It is the responsibility of the distributor and/or the retailer to review all warranties and warnings of Fabtech products with the consumer prior to purchase.

Fabtech reserves the right to super cede, discontinue, change the design, finish, part number and/or application of parts when deemed necessary without written notice. Fabtech is not responsible for misprints or typographical errors within the website or price sheet. For the most recent Product Warranty and Warnings visit our website [www.fabtechmotorsports.com](http://www.fabtechmotorsports.com)