



www.fabtechmotorsports.com

4331 EUCALYPTUS AVE. CHINO, CA. 91710
PHONE 909-597-7800 FAX 909-597-7185
1987 – 1995 Jeep YJ
FTT94009BK Jeep YJ Corner Guards Half

PARTS LIST:

	FTT94009	Jeep YJ Rear Corner Guards
Qua	Part #	Description
1	FT50227BK	Driver Rear Corner Guard Half
1	FT50228BK	Pass. Rear Corner Guard Half
1	FT50654	Hardware Subassembly

	FT50654 HARDWARE SUBASSEMBLY
2	FT50200BK Light Insert
1	FTREGCARD - Registration card
1	FTAS12 - Fabtech Sticker
1	FTT94009i - Instruction Sheet

	Hardware for YJ Corner Guards
Qua	Description
16	1/4"-20 x 3/4" Tread Forming countersunk torx bolt
14	1/4"-20 Nylock nut
14	1/4" SAE Washers
5	10/32 x 3/4" thread forming bolts w/ washers

Tool List: (Not Included)

Torx Bits
Assorted SAE and Metric Sockets and Wrenches
Drill with assorted bits (inc. 7/32" Drill Bit)
Large C-Clamps or Vise Grips

READ ALL INSTRUCTIONS THOROUGHLY FROM START TO FINISH BEFORE BEGINNING INSTALLATION!

CHECK ALL PARTS INCLUDED IN THIS KIT TO THE PARTS LIST ABOVE BEFORE BEGINNING INSTALLATION OF THIS KIT. IF ANY PIECES ARE MISSING, CONTACT FABTECH AT 909-597-7800.

INSTRUCTIONS:

1. Disconnect the negative terminal on the battery. Place the Jeep on a level working area. Working from both sides of the vehicle, remove the taillight housings save hardware. Remove license plate and holder, and gas filler pocket. Save the gas filler tube hardware, as they will be re-installed. Discard the license plate holder and filler pocket hardware.
2. Working from the driver side, locate FT50227 driver Corner Guard and carefully place in against the rear of the Jeep. Position the corner guard on the Jeep so that the corner guard lines up even with the bottom of the body line. Use a c-clamp or vise grip clamp to hold the corner against the Jeep. SEE PHOTO BELOW.




3. Using a drill with a 7/32" drill bit, drill the pilot holes for the mounting bolts. Start with the front lower mounting hole. Make sure that there is no wiring other items that will be damaged while drilling. SEE PHOTO BELOW.



4. Install the supplied Counter-sunk Torx bolts. Install the nylock nuts, and washers to ALL EXPOSED BOLTS ON THE INSIDE OF THE JEEP. **The self-threading bolts are ONLY to be used WITHOUT the nylock nuts where there is no access to the backside of the bolt.** Do not over tighten the bolts where a nylock will not be used. SEE PHOTOS BELOW.



5. Repeat steps two through four on the passenger side of the Jeep.
6. If installing an L.E.D. light kit, do so at this time according to the instructions with that kit. To re-use the factory taillights, locate and install FT50020BK Light Insert, place the insert into the hole in the corner guard. The spacer is the same for the right and left side. Position the spacer so the factory boltholes are lined up to re-mount the factory taillight. Attach the factory light housing back to the Jeep. SEE PHOTO ON NEXT PAGE.

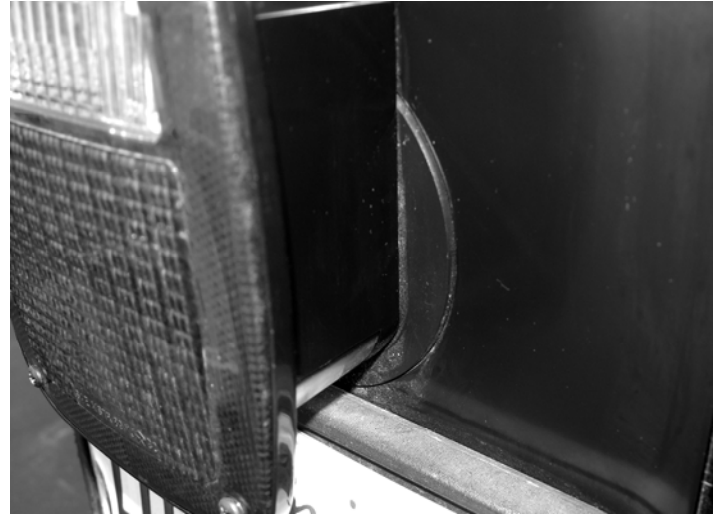

7. Attach the factory gas filler tube to the factory gas filler pocket using the factory hardware. Use the supplied 10/32" thread forming bolts, attach the license plate and holder, and gas filler pocket to the body. NOTE- These are thread forming bolts, use care when installing them, DO NOT OVER TIGHTEN THEM.

RETORQUE ALL NUTS, BOLTS AND LUGS AFTER 50 MILES AND PERIODICALLY THEREAFTER.

For technical assistance call: 909-597-7800

Product Warranty and Warnings-

Fabtech provides a Limited Lifetime Warranty to the original retail purchaser who owns the vehicle, on which the product was originally installed, for defects in workmanship and materials.

The Limited Lifetime Warranty excludes the following Fabtech items; bushings, bump stops, ball joints, tie rod ends, limiting straps, cross shafts, heim joints. These parts are subject to wear and are not considered defective when worn. They are warranted for 60 days from the date of purchase for defects in workmanship.

Take apart shocks are considered a serviceable shock with a one year warranty on leakage only. Service seal kits are available separately for future maintenance. All other shocks are covered under our Limited Lifetime Warranty.

Fabtech does not warrant any product for finish, alterations, modifications and/or installation contrary to Fabtech's instructions. Alterations to the finish of the parts including but not limited to painting, powdercoating, plating and/or welding will void all warranties. Some finish damage may occur to parts during shipping which is considered normal and is not covered under warranty.

Fabtech products are not designed nor intended to be installed on vehicles used in race applications or for racing purposes or for similar activities. (A "RACE" is defined as any contest between two or more vehicles, or any contest of one or more vehicle against the clock, whether or not such contest is for a prize). This warranty does not include coverage for police or taxi vehicles, race vehicles, or vehicles used for government or commercial purposes. Also excluded from this warranty are sales outside of the United States of America.

Installation of most suspension products will raise the center of gravity of the vehicle and will cause the vehicle to handle differently than stock. It may increase the vehicle's susceptibility to a rollover, on road and off road, at all speeds. Extreme care should be taken to operate the vehicle safely at all times to prevent rollover or loss of control resulting in serious injury or death. Fabtech front end Desert Guards may impair the deployment or operation of vehicles equipped with supplemental restraining systems/air bag systems and should not be installed if the vehicle is equipped as so.

Fabtech makes every effort to ensure suspension product compatibility with all vehicles listed in the catalog, but due to unknown auto manufacturers production changes and/or inconsistencies by the auto manufacturer, Fabtech cannot be responsible for 100% compatibility, including the fitment of tire and wheel sizes listed. The Tire and Wheel sizes listed in Fabtech's catalog are only a guideline for street driving with noted fender trimming. Fabtech is not responsible for damages to the vehicle's body or tires.

Fabtech's obligation under this warranty is limited to the repair or replacement, at Fabtech option, of the defective product only. All costs of removal, installation or re-installation, freight charges, incidental or consequential damages are expressly excluded from this warranty. Fabtech is not responsible for damages and/or warranty of other vehicle parts related or non related to the installed Fabtech product. This warranty is expressly in lieu of all other warranties expressed or implied. This warranty shall not apply to any product that has been subject to accident, negligence, alteration, abuse or misuse as determined by Fabtech.

Fabtech suspension components must be installed as a complete system including shocks as shown in our current catalog. All warranties will become void if Fabtech parts are combined and/or substituted with other aftermarket suspension products. Combination and/or substitution of other aftermarket suspension parts may cause premature wear and/or product failure resulting in an accident causing injury or death. Fabtech does not warrant products not manufactured by Fabtech.

Installation of Fabtech product may void the vehicles factory warranty; it is the consumer's responsibility to check with their local vehicle's dealer for warranty disposition before the installation of the product.

It is the responsibility of the distributor and/or the retailer to review all warranties and warnings of Fabtech products with the consumer prior to purchase.

Fabtech reserves the right to supercede, discontinue, change the design, finish, part number and, or application of parts when deemed necessary without written notice. Fabtech is not responsible for misprints or typographical errors within the catalog or price sheet.