

INSTALLATION INSTRUCTIONS

2020-2024 JEEP GLADIATOR MOJAVE (JT)

2" TRAIL KIT

FTS24286

NOTE: TO ORDER WEARABLE REPLACEMENT COMPONENTS DO NOT USE PART NUMBERS SHOWN ON THIS INSTRUCTION SHEET. GO TO FABTECH WEBSITE AND LOOK UP WEARABLE REPLACEMENT PARTS TO FIND THE PROPER PART NUMBER TO ORDER.

Fabtech Motorsports | 2213 Industrial Park Rd. Lancaster, SC 29720

Tech Line: 909-597-7800 | **Web:** www.fabtechmotorsports.com

FTS24286 2" GLADIATOR MOJAVE TRAIL KIT		
2	FT50261BK	SWAY BAR ENDLINK (FRONT)
2	FT1599-2-4	SWAY BAR ENDLINKS (REAR)
1	FT50618	FRONT TRACK BAR BRACKET
2	FT50774	REAR BUMPSTOP SPACER
1	FT50781	HARDWARE KIT
1	FT50783	REAR TRACK BAR BRACKET
2	FT50932	COIL CORRECTION SPACER
2	FT50920	FRONT BUMPSTOP SPACER
1	FT50924	HARDWARE SUBASSEMBLY

FT50924 HARDWARE SUBASSEMBLY		
8	FT1004	HALF BUSHING (REAR END LINK)
1	FT24286i	INSTRUCTIONS
8	FT404739	SLEEVE 12MM
1	FT50048	5/8 HOURGLASS BUSHING (FRONT END LINK)
2	FT50060	FRONT BUMPSTOP NUT TAB
2	FT50592	SLEEVE 1.000 X .563 X 1.400 (TRACK BAR)
1	FT50616	FRONT TRACK BAR NUT TAB
1	FTAS12	STICKER FT BLUE 10X4
1	FTAS16	DRIVER WARNING DECAL
1	FTLUBE	URETHANE LUBE PACKET
1	FTREGCARD	REGISTRATION CARD
1	FT50972	HARDWARE KIT

FT50781 - HARDWARE KIT		LOCATION
6	M12-1.50 X 70MM HEX BOLT	SWAY BAR LINKS
6	12MM WASHER	
4	12MM LARGE OD WASHER	
4	M12-1.50 C-LOCK NUT	
2	1/2-13 X 3-1/2 HEX BOLT	FRONT BUMPSTOP
2	1/2" SPLIT LOCK WASHER	
1	9/16-12 X 3" HEX HEAD	FRONT TRACK BAR
2	9/16 SAE WASHER	
1	C-LOCK NUT 9/16"-12	
4	5/16-18 X 1" HEX BOLT	REAR BUMPSTOP
8	5/16 SAE WASHER	
4	5/16-18 C-LOCK NUT	
2	1/2-13 X 4-1/2 HEX BOLT	LONG TRAVEL BRKT
4	1/2 SAE WASHER	
2	1/2-13 C-LOCK NUT	
6	3/8-16 X 1-1/4" HEX BOLT	LT BRKT/FRT TRACK
9	3/8" WASHER	
1	3/8" LOCK WASHER	
3	3/8-16 C-LOCK NUT	
2	5/16 SELF TAPPING BOLT	REAR BRAKE LINE
1	THREAD LOCKING COMPOUND 1 MIL	
3	7/16-14 X 1" HEX BOLT	REAR TRACK BAR
6	7/16" WASHER	
3	7/16-14 C-LOCK NUT	

FT50972 - HARDWARE KIT		LOCATION
2	M14-2.0 X 70MM HEX BOLT	SWAY BAR LINKS
4	14MM FLAT WASHER	
2	M14-2.0 C-LOCK NUT	

NOTE: REFER TO OPTIONAL KIT BOX INSTRUCTIONS PRIOR TO INSTALLATION.

- TOOL LIST -

Required Tools (Not Included)

Basic Hand Tools
Floor Jack
Jack Stands
Assorted Metric and S.A.E sockets, and Allen wrenches
Torque Wrench
Die Grinder w/ Cutoff Wheel or Sawzall

- PRE-INSTALLATION NOTES -

For technical assistance call: **909-597-7800** or e-mail: **info@fabtechmotorsports.com**

READ THIS BEFORE YOU BEGIN INSTALLATION -

Check all parts to the parts list above before beginning installation. If any parts are missing contact Fabtech at 909-597-7800 and a replacement part will be sent to you immediately.

Read all instructions thoroughly from start to finish before beginning the installation. If these instructions are not properly followed severe frame, driveline and / or suspension damage may occur.

Check your local city and state laws prior to the installation of this system for legality. Do not install if not legal in your area.

Prior to the installation of this suspension system perform a front end alignment and record. Do not install this system if the vehicle alignment is not within factory specifications. Check for frame and suspension damage prior to installation.

The installation of this suspension system should be performed by two professional mechanics.

This suspension must be installed with Fabtech shock absorbers.

Installation of all fasteners requires the use of provided thread locking compound with proper torque values as indicated throughout the installation. Apply thread locking compound upon the final torque of the fastener.

WARNING- Installation of this system will alter the center of gravity of the vehicle and may increase roll over as compared to stock.

Vehicles that receive oversized tires should check ball joints, uniballs, tie rods ends, pitman arm and idler arm every 2500-5000 miles for wear and replace as needed.

Verify differential fluid is at manufactures recommended level prior to kit installation. Installation of the kit will reposition the differential and the fill plug hole may be in a different position. (For example, if the manufacture recommends 3 quarts of fluid, make sure the diff has 3 quarts of fluid). Check your specific manual for correct amount of fluid.

FOOTNOTES -

- *Heavy offroad use requires driveshafts 4 door model Front (FTS94057) Rear (FTS94068).*
- *Fits Mojave models only.*

- INSTRUCTIONS -

FRONT SUSPENSION

1. Disconnect the negative terminal on the battery. Jack up the front end of the truck and support the frame rails with jack stands. **NEVER WORK UNDER AN UNSUPPORTED VEHICLE!** Remove the front tires.
2. On both the Driver and Passenger side, unbolt the front brake line brackets from the frame and the link arm. Save all hardware. **SEE FIGURES 1-2** On the driver side unclip the differential breather hose from the upper coil spring mount. **SEE FIGURE 3**

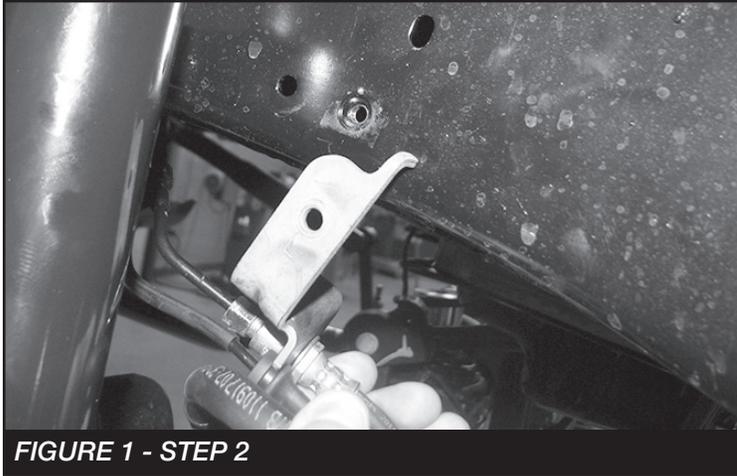


FIGURE 1 - STEP 2

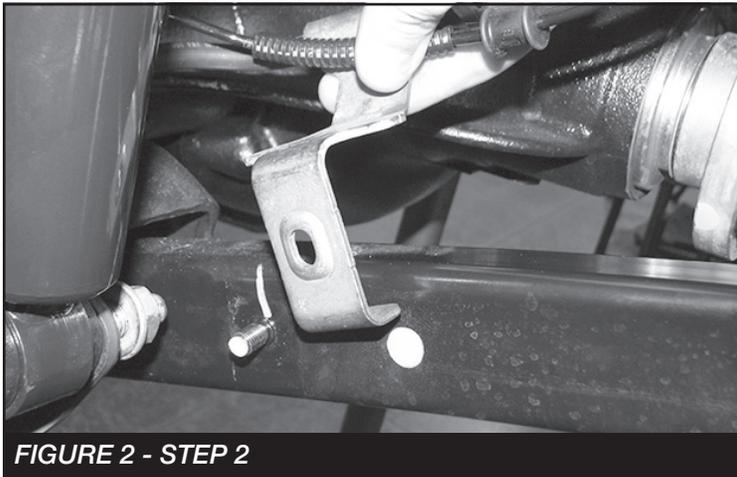


FIGURE 2 - STEP 2

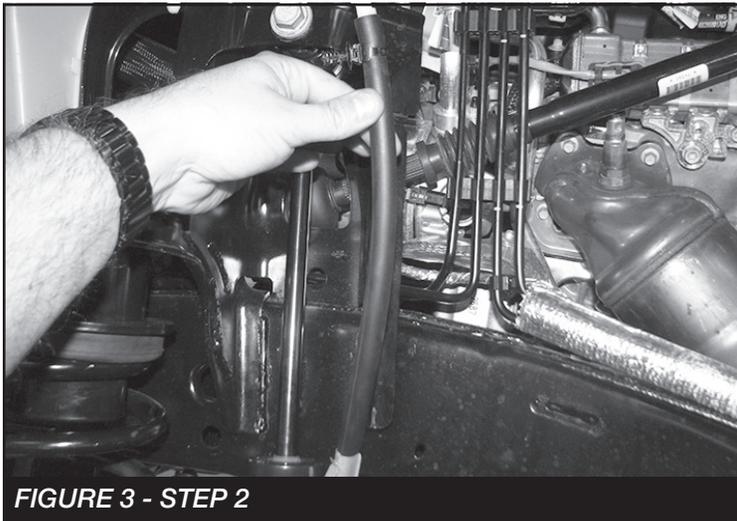


FIGURE 3 - STEP 2

3. Unbolt and remove both driver and passenger side brake line brackets from the axle spring perch. **SEE FIGURE 4**

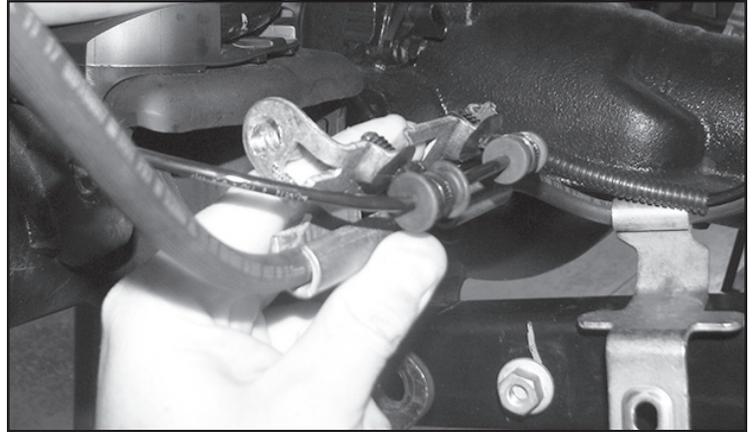


FIGURE 4 - STEP 3

4. Remove and discard the factory sway bar endlinks, save the hardware.
5. With the axle supported, disconnect the factory shocks at the lower mount. Save all hardware. Lower the front axle and remove the factory coil springs.
6. **If installing FTS24246 Lower link arms, do so now with the instructions provided in the kit box.**
7. Disconnect the front track bar at the axle. Save hardware.
8. Install FT50618 (Front track bar bracket) to the factory mount using stock bolt. **SEE FIGURE 5.** Mark the 2 holes to drill using the new bracket as a guide. Remove and drill the holes to 3/8"

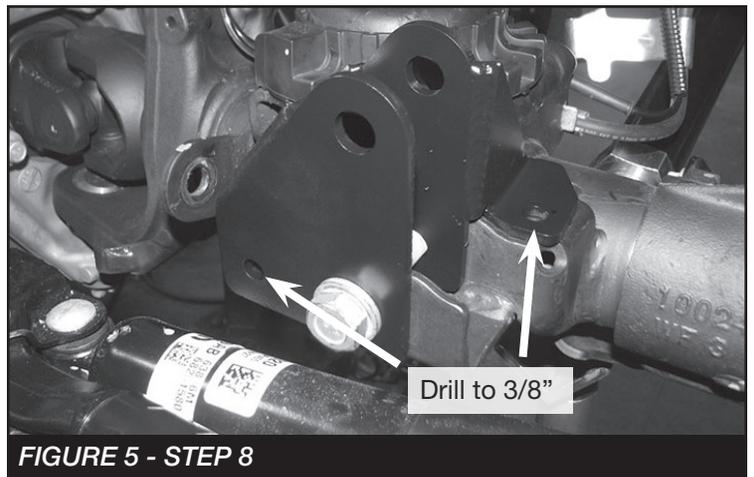


FIGURE 5 - STEP 8

9. Reinstall the bracket using the factory bolt and (2) supplied 3/8" x 1-1/4" bolts and hardware. **NOTE: Install the FT50592 (Sleeve) with the factory bolt between the new track bar bracket and the FT50616 (3/8" Nuttab) by inserting through the opening under the factory bracket for the rear vertical pad location. SEE FIGURE 6-7**

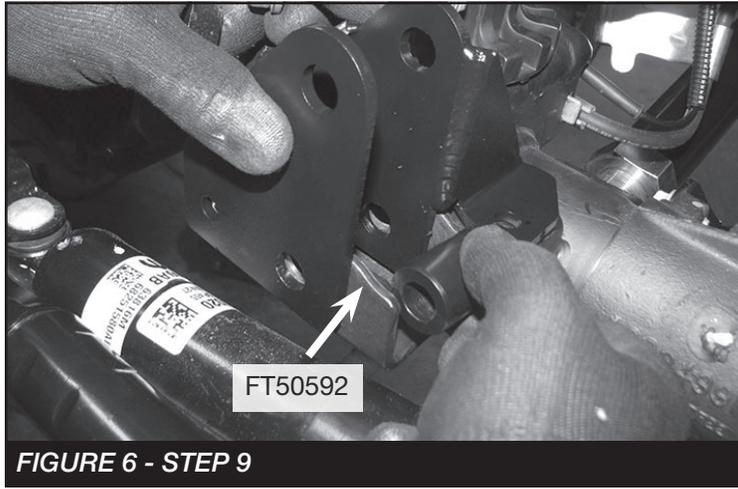


FIGURE 6 - STEP 9

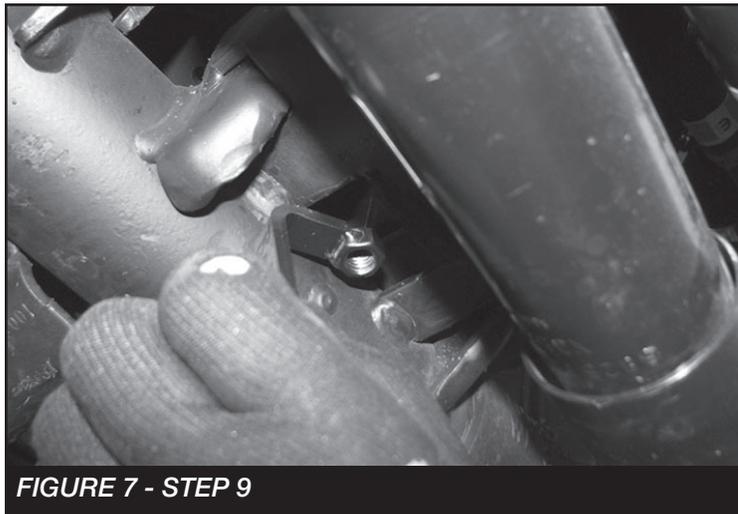


FIGURE 7 - STEP 9

10. If installing FTS24210 Drag Link Kit, do so now with the instructions provided in the kit box.

11. Remove the factory hydraulic bump stop from the coil spring bucket. Save hardware. **SEE FIGURE 8**



FIGURE 8 - STEP 11

12. Slide the upper rubber coil spring isolator down on the hydraulic bump stop. The two rubber locating tabs need to be removed from the isolator. Once removed rotate the isolator 180 degrees from where it was. Install the bump stop back into the vehicle using the original hardware. Torque to 53 ft-lbs. **SEE FIGURES 9-10**

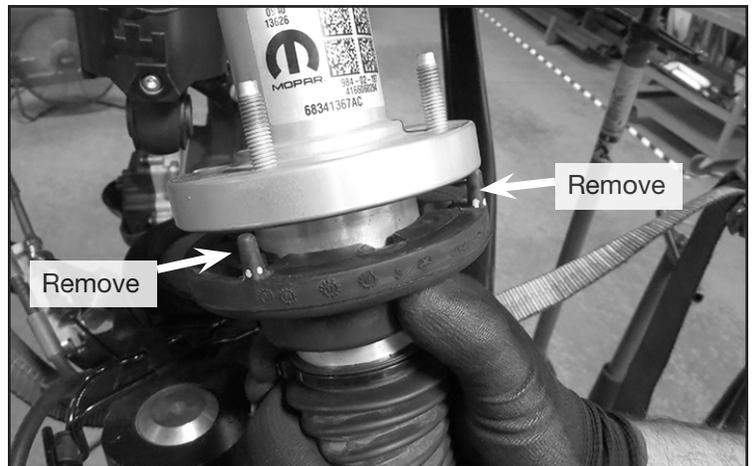


FIGURE 9 - STEP 12

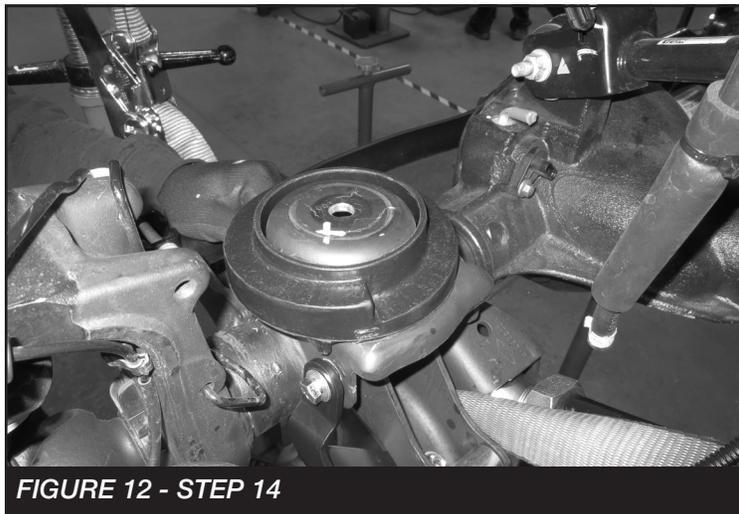


FIGURE 10 - STEP 12


13. On the factory lower coil spring perch. Remove the plastic coil isolator. Use a drill with a 1/2" drill bit and drill out the existing factory hole on both driver & passenger sides. **SEE FIGURE 11**



14. Install FT50932 (Coil spring mount) onto the factory coil spring perch. **SEE FIGURES 12**



15. **DRIVER SIDE:** Insert a 1/2" x 3-1/2" bolt inside the FT50920 (Front bumpstop spacer). Place the FT50920 (Bumpstop spacer) into the bottom of FT50600 (Front driver spring) then install the spring into the vehicle as one unit. **NOTE: The driveshaft and front trac bar may have to be disconnected to install the springs into the vehicle.** Once installed insert the FT50060 (Nut tab) through the opening under the spring perch and thread the 1/2" bolt. Torque to 127 ft-lbs. **SEE FIGURES 13-14** Repeat on passenger side using the FT50601 (Passenger front coil spring).

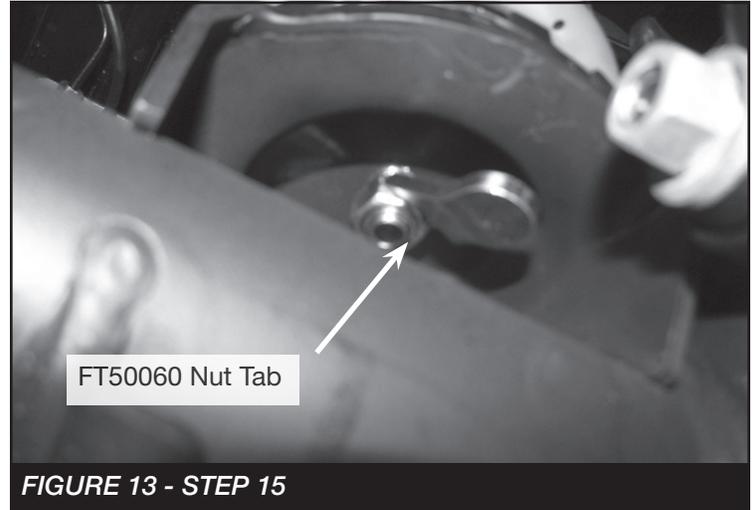

16. Re-install the track bar using the supplied 9/16" X 3" bolt, nut and washers. Torque to 153 ft-lbs. **SEE FIGURE 15**

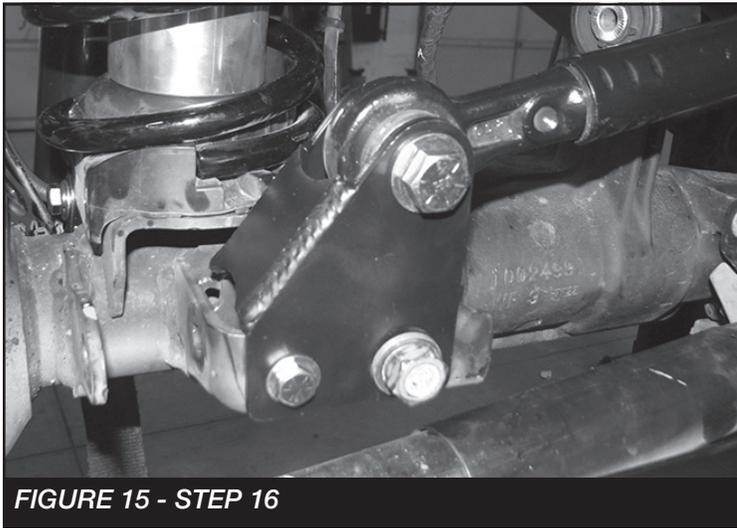


FIGURE 15 - STEP 16

- If installing FTS24283 (Shock Extension Kit) continue with the instructions provided in the box kit.

17. Install FT50048 (Bushings) and FT404739 (Sleeves) into FT50261BK (Sway bar links). Then, install the links to the axle mount and sway bar using the supplied M12 x 70mm or M14 hardware (2024 Models) for the upper location and the factory for the lower. Torque to 65 ft-lbs. **SEE FIGURE**

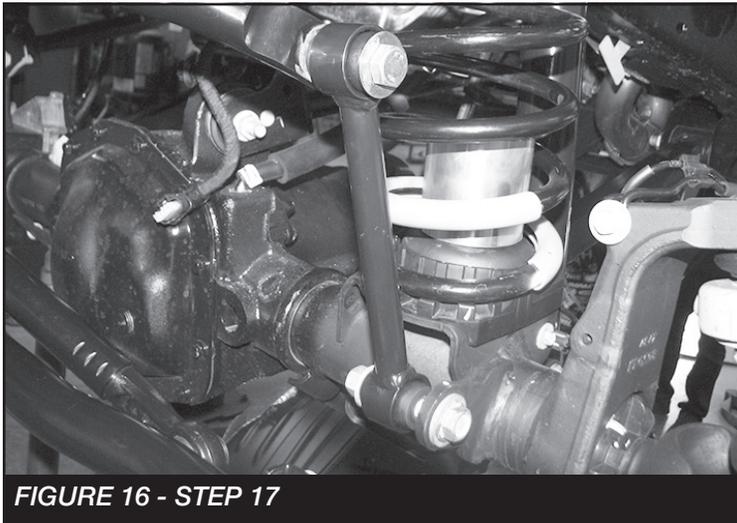


FIGURE 16 - STEP 17

16

18. Reconnect all brake line brackets with the factory hardware and torque 29 ft-lbs. **NOTE: Bend the lower**

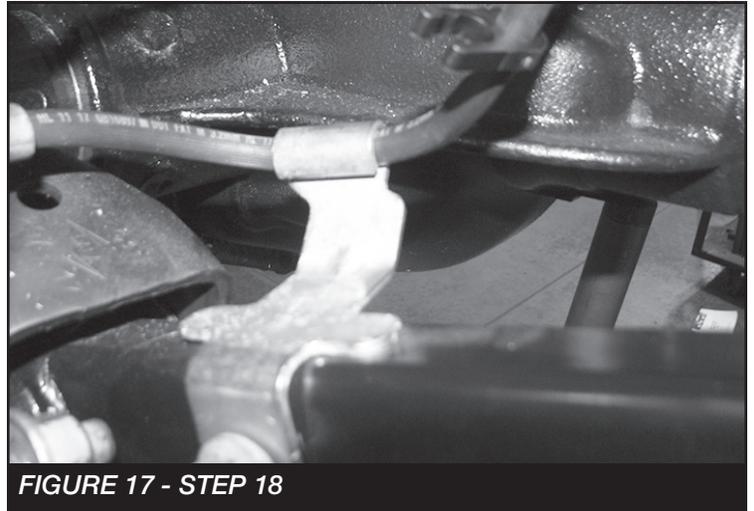


FIGURE 17 - STEP 18

link arm brake line bracket upward an inch to give the line some relief at full extension. **SEE FIGURE 17**



FIGURE 18 - STEP 19

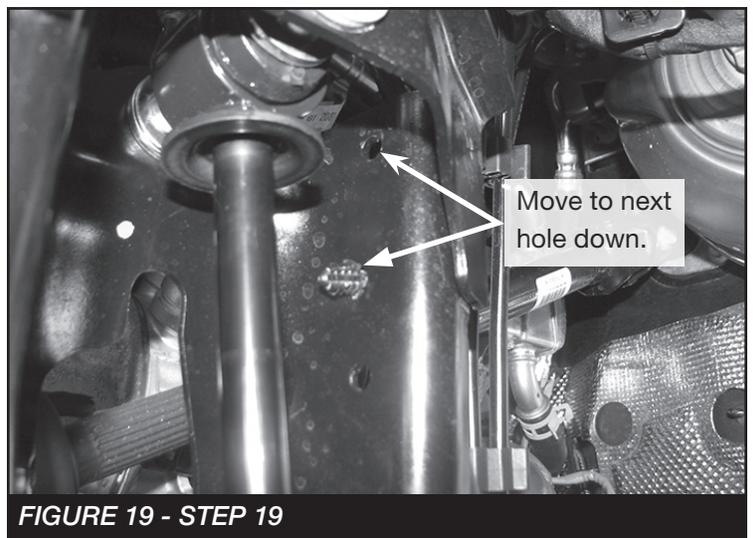


FIGURE 19 - STEP 19

19. Reinstall the diff breather hose by moving the metal clip up the hose 2" **SEE FIGURE 18** and the christmas tree fastener into the next hole down. **SEE FIGURE 19.**

- REAR SUSPENSION -

20. Jack up the rear end of the vehicle and support the frame rails with jack stands. **NEVER WORK UNDER AN UNSUPPORTED VEHICLE!** Remove the rear tires. Support the rear axle; do not allow axle to hang freely.
21. Disconnect the brake line bracket from the frame. Remove the rear sway bar endlinks then disconnect the rear shocks from the lower axle mount. Save hardware.
22. Carefully lower the axle and remove the factory springs.



FIGURE 20 - STEP 23

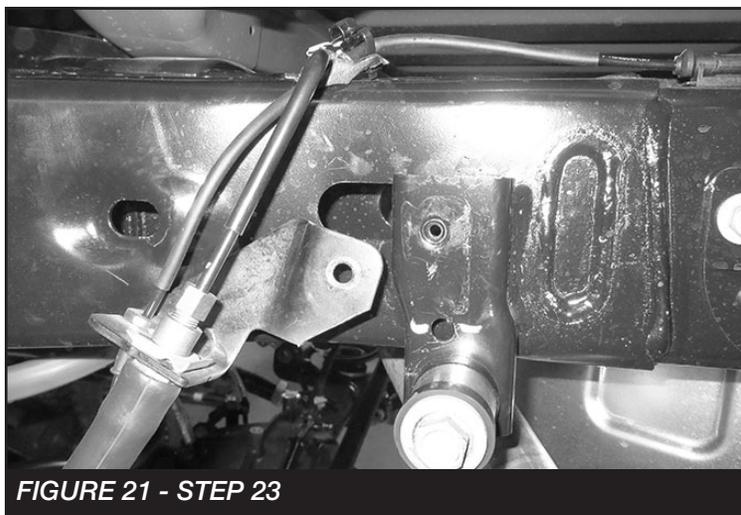


FIGURE 21 - STEP 23

Save the upper rubber spring isolators.

23. Mark and cut off the locator tab and corner of the bracket

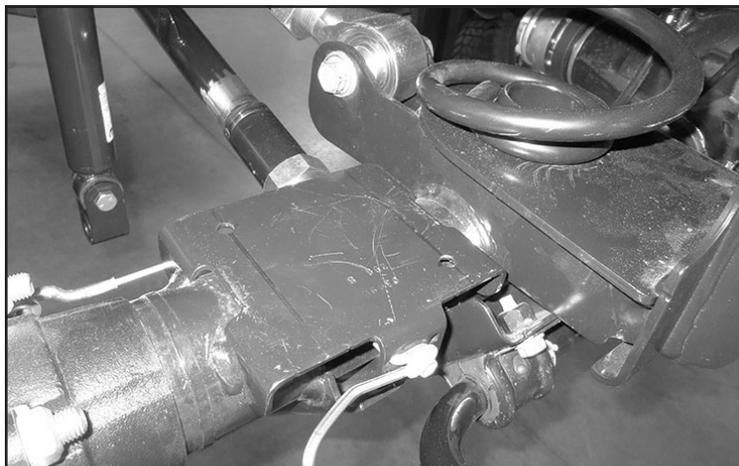


FIGURE 22 - STEP 24



FIGURE 23 - STEP 24

like shown in **FIGURES 20-21.**

24. Install FT50774 (Rear bumpstop brackets) using the supplied 5/16" x 1" hardware and the factory holes on the bumpstop pad. Torque to 17 ft-lbs. **SEE FIGURES 22-23**

25. Continue with the installation of the lower links at this time using the supplied instructions with that kit.

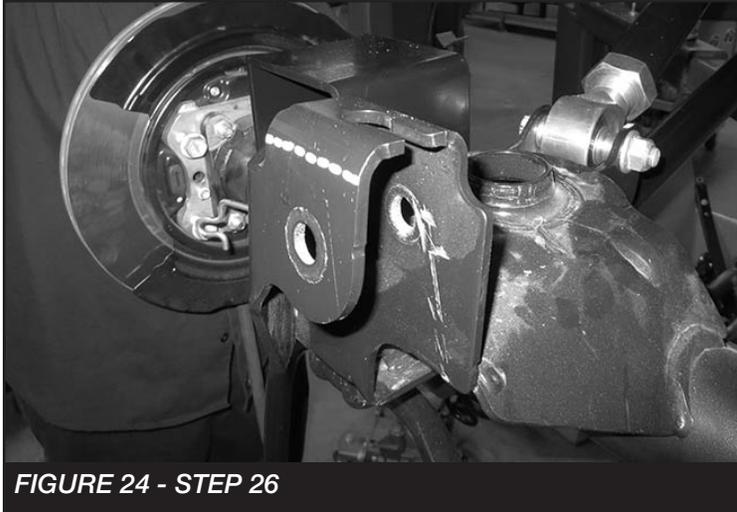


FIGURE 24 - STEP 26



FIGURE 25 - STEP 26

26. Locate the factory rear track bar bracket. Mark a straight line on the front and back before the 90 degree bend. Remove the track bar from the axle bracket and cut the top section off. **SEE FIGURES 24-25**



FIGURE 26 - STEP 27



FIGURE 27 - STEP 27



FIGURE 28 - STEP 27

27. Install the FT50783 (Rear track bar bracket) onto the factory bracket. Insert the supplied 9/16" X 3" bolt. Mark the 3 holes using the new bracket as a template. **SEE FIGURES 26-28.** Remove and drill the 3 holes using a 7/16" drill bit.



FIGURE 29 - STEP 28

28. Reinstall the FT50783 (Track bar bracket) using the supplied 7/16" x 1" hardware. **DO NOT TIGHTEN.** Install FT50592 (Rear track bar sleeve) using the supplied 9/16" x 3" bolt and hardware. **SEE FIGURE 29** Torque 7/16" hardware to 83 ft-lbs and 9/16" to 148 ft-lb28
29. Install the new coil springs FT50752 (Rear Driver) & FT50753 (Rear Passenger) using the factory upper coil isolators. Support the rear axle so the springs stay in place.
 - **If installing FTS24283 (Shock Extension Kit) continue with the instructions provided in the box kit.**
30. Install the FT1004 (Half bushings) and FT404739 (Sleeves) into FT1599-2-4 (Rear sway bar links). Then, install the new links to the sway bar and sway bar mount on the frame using supplied M12 x 70mm bolt and large O.D.

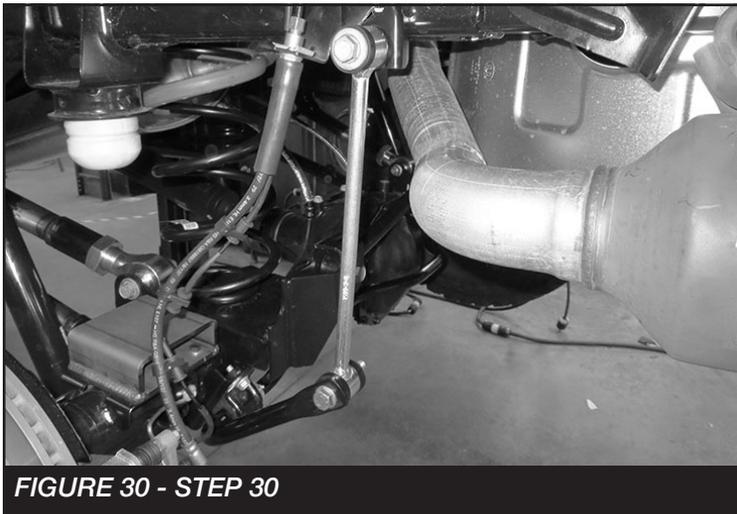


FIGURE 30 - STEP 30

washer for the upper location and M12 x 70mm bolt regular washer, large O.D. washer and nut for the lower. Use the larger washer on the nut side. **NOTE: The new end link will need to be installed on the inside of the sway bar and axle mount.** Torque to 65 ft-lbs **SEE**



FIGURE 31 - STEP 31



FIGURE 32 - STEP 31

FIGURE 30

31. Using the brake line bracket as a template pull down 1" from where the factory location. Mark and drill using a 9/32" drill bit. **NOTE: Drill through the mount as well as the frame.** Then, install the bracket using the supplied 5/16" self tapping bolt. **SEE FIGURES 31-32**
32. Install tires and wheels and torque lug nuts to wheel manufacturer's specifications. Turn front tires left to right and check for appropriate tire clearance. **Note - Some oversized tires may require trimming of the front bumper & valance.**
33. Check front end alignment and set to factory specifications. Readjust headlights.
34. Recheck all bolts for proper torque.
35. Recheck brake hoses, ABS wires and suspension parts for proper tire clearance while turning tires fully left to right.
36. Check the fluid in the front and rear differential and fill if needed with factory specification differential oil. **Note - some differentials may expel fluid after filling and driving. This can be normal in resetting the fluid level with the new position of the differential/s.**
37. Install Driver Warning Decal. Complete product registration card and mail to Fabtech in order to receive future safety and technical bulletins on this suspension.

Vehicles that will receive oversized tires should check ball joints, uniballs and all steering components every 2500-5000 miles for wear and replace as required.

RETORQUE ALL NUTS, BOLTS AND LUGS AFTER 50 MILES AND PERIODICALLY THEREAFTER.

For technical assistance call: **909-597-7800**

- Product Warranty and Warnings -

Fabtech provides a Limited Lifetime Warranty to the original retail purchaser who owns the vehicle, on which the product was originally installed, for defects in workmanship and materials.

The Limited Lifetime Warranty excludes the following Fabtech items; bushings, bump stops, ball joints, tie rod ends, limiting straps, cross shafts, heim joints and driveshafts. These parts are subject to wear and are not considered defective when worn. They are warranted for 60 days from the date of purchase for defects in workmanship.

Dirt Logic and Performance Coilover take apart shocks are considered a serviceable shock with a one year warranty on leakage only. Service seal kits are available separately for future maintenance. All other shocks are covered under our Limited Lifetime Warranty.

Fabtech does not warrant any product for finish, alterations, modifications and/or installation contrary to Fabtech's instructions. Alterations to the finish of the parts including but not limited to painting, powder coating, plating and/or welding will void all warranties. Some finish damage may occur to parts during shipping, which is considered normal and is not covered under warranty.

Fabtech products are not designed nor intended to be installed on vehicles used in race applications or for racing purposes or for similar activities. (A "RACE" is defined as any contest between two or more vehicles, or any contest of one or more vehicle against the clock, whether or not such contest is for a prize). This warranty does not include coverage for police or taxi vehicles, race vehicles, or vehicles used for government or commercial purposes. Also excluded from this warranty are sales outside of the United States of America.

Installation of most suspension products will raise the center of gravity of the vehicle and will cause the vehicle to handle differently than stock. It may increase the vehicle's susceptibility to a rollover, on road and off road, at all speeds. Extreme care should be taken to operate the vehicle safely at all times to prevent rollover or loss of control resulting in serious injury or death. Fabtech front end Desert Guards may impair the deployment or operation of vehicles equipped with supplemental restraining systems/air bag systems and should not be installed if the vehicle is equipped as so.

Fabtech makes every effort to ensure suspension product compatibility with all vehicles listed on the website, but due to unknown auto manufacturer's production changes and/or inconsistencies by the auto manufacturer, Fabtech cannot be responsible for 100% compatibility, including the fitment of tire and wheel sizes listed. The Tire and Wheel sizes listed in Fabtech's website are only a guideline for street driving with noted fender trimming. Fabtech is not responsible for damages to the vehicle's body or tires. Fabtech is not responsible for premature wear of factory components due to the installation of oversized tires and wheels.

Fabtech's obligation under this warranty is limited to the repair or replacement, at Fabtech option, of the defective product only. All costs of removal, installation or re-installation, freight charges, incidental or consequential damages are expressly excluded from this warranty. Fabtech is not responsible for damages and/or warranty of other vehicle parts related or non related to the installed Fabtech product. This warranty is expressly in lieu of all other warranties expressed or implied. This warranty shall not apply to any product that has been subject to accident, negligence, alteration, abuse or misuse as determined by Fabtech.

Fabtech suspension components must be installed as a complete system including shocks as shown on our website. All warranties will become void if Fabtech parts are combined and/or substituted with other aftermarket suspension products. Combination and/or substitution of other aftermarket suspension parts may cause premature wear and/or product failure resulting in an accident causing injury or death. Fabtech does not warrant products not manufactured by Fabtech.

Depending on the condition of the factory suspension components retained after the installation of a Fabtech suspension not all vehicles may have the same ride stance front to rear as described in the website. The blue color of suspension components shown in all Fabtech photographs are for display purposes only. Majority of all Fabtech components will be black specifically where noted with part numbers ending in BK.

Installation of Fabtech product may void the vehicles factory warranty; it is the consumer's responsibility to check with their local vehicle's dealer for warranty disposition before the installation of the product. Some state laws may prohibit modification of suspension to a vehicle in whole or in part. It is the responsibility of the installer and consumer to consult local laws prior to the installation of any Fabtech suspension product to comply with such written laws.

It is the responsibility of the distributor and/or the retailer to review all warranties and warnings of Fabtech products with the consumer prior to purchase.

Fabtech reserves the right to super cede, discontinue, change the design, finish, part number and/or application of parts when deemed necessary without written notice. Fabtech is not responsible for misprints or typographical errors within the website or price sheet. For the most recent Product Warranty and Warnings visit our website www.fabtechmotorsports.com