



FTS82506 Dirt Logic 2.5" 2000-2005 Toyota Tundra Non Reservoir Coilover Installation Instructions

2000-05 Toyota Tundra 2WD & 4WD Non Reservoir Coilover Installation Instructions:

Spanner wrench is not included in this kit if needed order FTS98008

Removal

With the vehicle on level ground, set the emergency brake and block the rear tires. **NEVER WORK UNDER AN UNSUPPORTED VEHICLE!** 1.) With the help of floor jack lift up the front end of the vehicle and support the weight by the use of jack stands. 2.) Loosen lug nuts off both front wheels and remove wheels off the vehicle. 3.) With both wheels off the vehicle and only working on the driver side, remove the 3 nuts from the upper shock mount plate. 4.) Remove the lower shock bolt and completely remove the shock assembly off the vehicle. 5.) Now move to the passenger side and repeat the procedures in removing the stock shock of the vehicle.



Installation

Still having the vehicle supported by the jack stands, start on the driver side. 1.) With the tank valve in the direction of the installer line up the 3 holes according to the bolt pattern on Fig 1 to the upper mount plate and installed the 3/8" bolts and washers provided with the Coilover. 2.) With the original lower nut and bolt that was removed for the vehicle and the supplied mis-alignments, place the lower rod end in the lower control arm. 3.) When installing the mis-alignments the larger of the two goes to the rear of the vehicle and the smaller one goes to the front. ***Please see Fig 2 for a reference drawing***

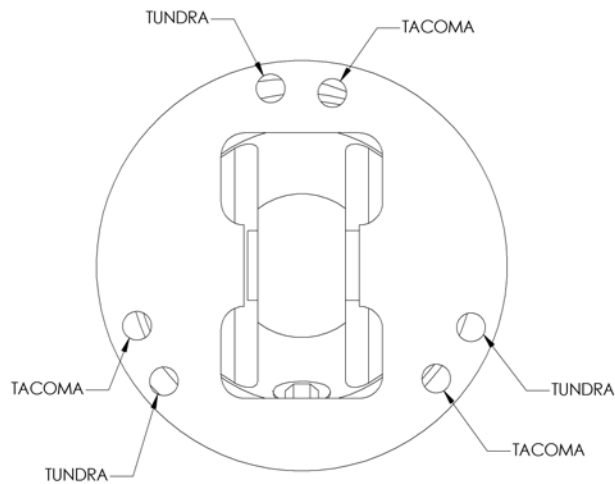


Fig 1

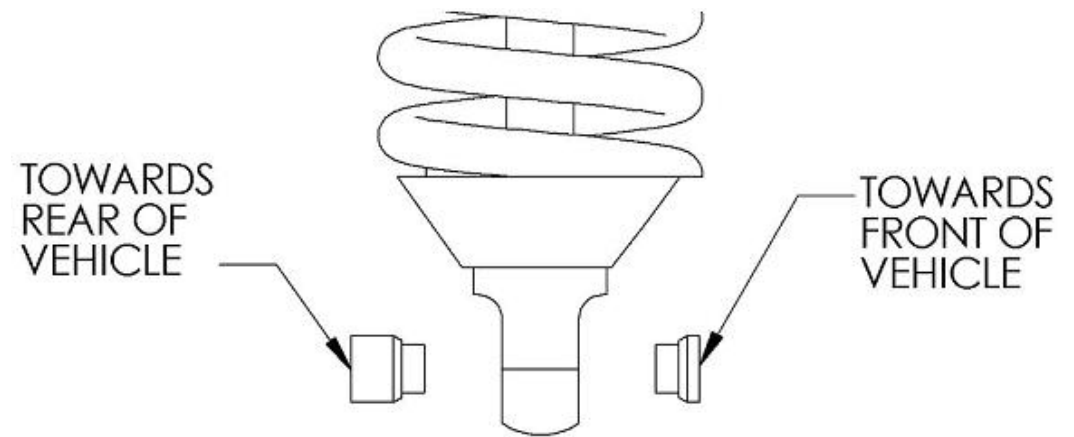


Fig 2

4.) Now move to the passenger side and repeat the procedures for the installation of the Coilover. 5.) Once both sides have the newly installed Coilover, reinstalled both wheels and torque the lug nuts to factory specifications. 6.) Raise the vehicle of the jack stands and lower the vehicle back on the ground. You have now completed your installation. Spanner wrench is not included in this kit if needed order FTS98008 We recommend driving the vehicle for 50 miles and retorquing nuts and bolts and then have it aligned to factory specs.



RETORQUE ALL NUTS, BOLTS AND LUGS AFTER 50 MILES AND PERIODICALLY THEREAFTER.

For technical assistance call: 909-597-7800

Product Warranty and Warnings-

Fabtech provides a Limited Lifetime Warranty to the original retail purchaser who owns the vehicle, on which the product was originally installed, for defects in workmanship and materials.

The Limited Lifetime Warranty excludes the following Fabtech items; bushings, bump stops, ball joints, tie rod ends, limiting straps, cross shafts, heim joints. These parts are subject to wear and are not considered defective when worn. They are warranted for 60 days from the date of purchase for defects in workmanship.

Take apart shocks are considered a serviceable shock with a one-year warranty on leakage only. Service seal kits are available separately for future maintenance. All other shocks are covered under our Limited Lifetime Warranty.

Fabtech does not warrant any product for finish, alterations, modifications and/or installation contrary to Fabtech's instructions. Alterations to the finish of the parts including but not limited to painting, powdercoating, plating and/or welding will void all warranties. Some finish damage may occur to parts during shipping, which is considered normal and is not covered under warranty.

Fabtech products are not designed nor intended to be installed on vehicles used in race applications or for racing purposes or for similar activities. (A "RACE" is defined as any contest between two or more vehicles, or any contest of one or more vehicle against the clock, whether or not such contest is for a prize). This warranty does not include coverage for police or taxi vehicles, race vehicles, or vehicles used for government or commercial purposes. Also excluded from this warranty are sales outside of the United States of America.

Installation of most suspension products will raise the center of gravity of the vehicle and will cause the vehicle to handle differently than stock. It may increase the vehicle's susceptibility to a rollover, on road and off road, at all speeds. Extreme care should be taken to operate the vehicle safely at all times to prevent rollover or loss of control resulting in serious injury or death. Fabtech front end Desert Guards may impair the deployment or operation of vehicles equipped with supplemental restraining systems/air bag systems and should not be installed if the vehicle is equipped as so.

Fabtech makes every effort to ensure suspension product compatibility with all vehicles listed in the catalog, but due to unknown auto manufacturer's production changes and/or inconsistencies by the auto manufacturer, Fabtech cannot be responsible for 100% compatibility, including the fitment of tire and wheel sizes listed. The Tire and Wheel sizes listed in Fabtech's catalog are only a guideline for street driving with noted fender trimming. Fabtech is not responsible for damages to the vehicle's body or tires.

Fabtech's obligation under this warranty is limited to the repair or replacement, at Fabtech option, of the defective product only. All costs of removal, installation or re-installation, freight charges, incidental or consequential damages are expressly excluded from this warranty. Fabtech is not responsible for damages and/or warranty of other vehicle parts related or non-related to the installed Fabtech product. This warranty is expressly in lieu of all other warranties expressed or implied. This warranty shall not apply to any product that has been subject to accident, negligence, alteration, abuse or misuse as determined by Fabtech.

Fabtech suspension components must be installed as a complete system including shocks as shown in our current catalog. All warranties will become void if Fabtech parts are combined and/or substituted with other aftermarket suspension products. Combination and/or substitution of other aftermarket suspension parts may cause premature wear and/or product failure resulting in an accident causing injury or death. Fabtech does not warrant products not manufactured by Fabtech.

Installation of Fabtech product may void the vehicles factory warranty; it is the consumer's responsibility to check with their local vehicle's dealer for warranty disposition before the installation of the product.

It is the responsibility of the distributor and/or the retailer to review all warranties and warnings of Fabtech products with the consumer prior to purchase.

Fabtech reserves the right to supersede, discontinue, change the design, finish, part number and, or application of parts when deemed necessary without written notice. Fabtech is not responsible for misprints or typographical errors within the catalog or price sheet.