



INSTALLATION INSTRUCTIONS

FTS26132		TOYOTA TUNDRA DIFF DROP KIT
1	FT70395	DIFF DROP BRACKET (DRIVER)
1	FT70396	DIFF DROP BRACKET (PASS)
1	FT70400	HARDWARE SUBASSEMBLY

FT70400		HARDWARE SUBASSEMBLY
4	FT1054	BUSHING
2	FT70393_6	SLEEVE
1	FTAS12	STICKER
1	FTAS16	DRIVER WARNING DECAL
1	FTREGCARD	REGISTRATION CARD
1	FT70404	BACK PLATE SPACER

FT70399 - HARDWARE KIT		LOCATION
2	M14-1.5 X 60MM ALLEN BOLT	
2	M14 FLAT WASHER	
3	M16-1.5 NYLOCK NUT	
3	M16 FLAT WASHER	

2022-2025 TOYOTA TUNDRA 4WD DIFF DROP BRACKET KIT FTS26132

NOTE: TO ORDER WEARABLE REPLACEMENT COMPONENTS DO NOT USE PART NUMBERS SHOWN ON THIS INSTRUCTION SHEET. GO TO FABTECH WEBSITE AND LOOK UP WEARABLE REPLACEMENT PARTS TO FIND THE PROPER PART NUMBER TO ORDER.

Fabtech Motorsports | 2213 Industrial Park Rd. Lancaster, SC 29720

Tech Line: 909-597-7800 | **Web:** www.fabtechmotorsports.com

- TOOL LIST -

Required Tools (Not Included)

Basic Hand Tools
Floor Jack
Jack Stands
Assorted Metric and S.A.E sockets, and Allen wrenches
Torque Wrench
Die Grinder w/ Cutoff Wheel or Sawzall

- PRE-INSTALLATION NOTES -

For technical assistance call: **909-597-7800** or e-mail: **info@fabtechmotorsports.com**

READ THIS BEFORE YOU BEGIN INSTALLATION -

Check all parts to the parts list above before beginning installation. If any parts are missing contact Fabtech at 909-597-7800 and a replacement part will be sent to you immediately.

This suspension and shocks have been designed to be installed on a stock vehicle.

Read all instructions thoroughly from start to finish before beginning the installation. If these instructions are not properly followed severe frame, driveline and / or suspension damage may occur.

Check your local city and state laws prior to the installation of this system for legality. Do not install if not legal in your area.

Prior to the installation of this suspension system perform a front end alignment and record. Do not install this system if the vehicle alignment is not within factory specifications. Check for frame and suspension damage prior to installation.

The installation of this suspension system should be performed by two professional mechanics. This suspension must be installed with Fabtech shock absorbers.

Installation of all fasteners requires the use of provided thread locking compound with proper torque values as indicated throughout the installation. Apply thread locking compound upon the final torque of the fastener.

WARNING- Installation of this system will alter the center of gravity of the vehicle and may increase roll over as compared to stock. Extreme care should be taken to operate the vehicle safely at all times to prevent rollover or loss of control resulting in serious injury or death.

Vehicles that receive oversized tires should check ball joints, uniballs, tie rods ends, pitman arm and idler arm every 2500-5000 miles for wear and replace as needed.

Verify differential fluid is at manufactures recommended level prior to kit installation. Installation of the kit will reposition the differential and the fill plug hole may be in a different position. (For example, if the manufacture recommends 3 quarts of fluid, make sure the diff has 3 quarts of fluid). Check your specific manual for correct amount of fluid.


Read all warnings and warranties on the last page of these instructions before starting installation.

FOOTNOTES -

-

- INSTRUCTIONS -

1. Disconnect the negative terminal on the battery.
Jack up the front end of the truck and support the frame rails with jack stands. **NEVER WORK UNDER AN UNSUPPORTED VEHICLE!**
Remove the front tires.
2. Support the front differential with a jack.
3. Remove the three bolts holding the passenger side bracket to the differential. Remove the nut and bolt holding the bracket to the chassis then, remove the bracket from the vehicle. Save all factory hardware.

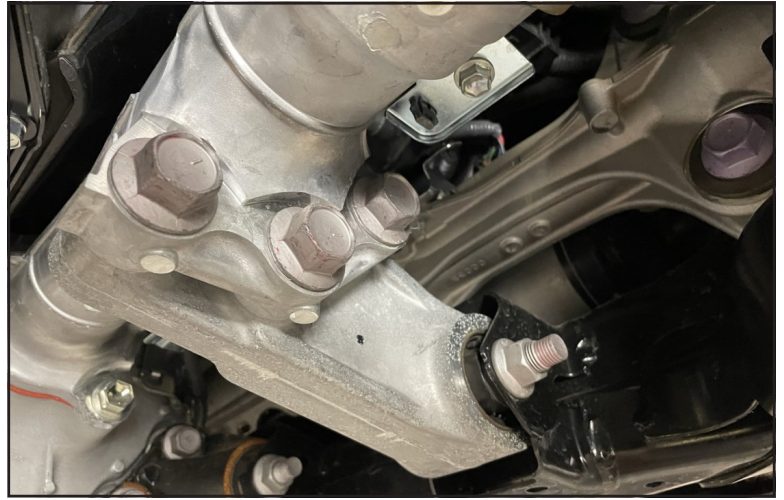


4. Remove the two bolts holding the driver side bracket to the differential. Remove the nut and bolt holding the bracket to the chassis, then remove the bracket from the vehicle. Save all factory hardware.



5. Above the passenger side bracket, the differential sensor wire needs to be relocated. Remove the bolt holding the harness bracket to the diff. Retain all hardware.



6. Relocate the bracket from the bottom to the top using the factory hardware. Torque to 20 ft-lbs.

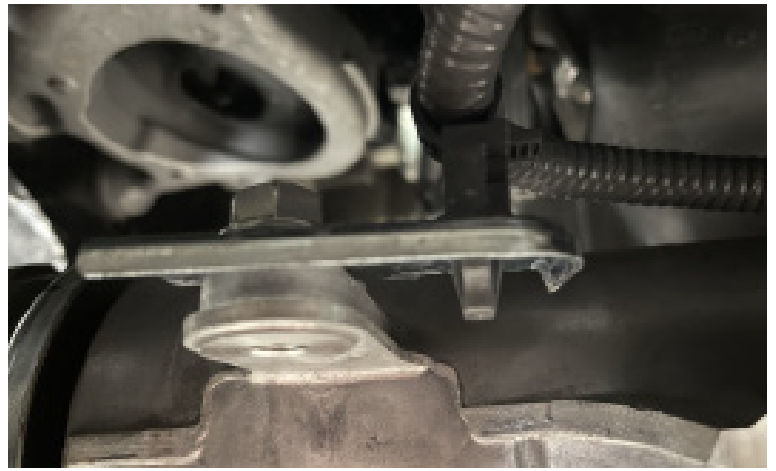

7. Locate the Driver side diff drop bracket (FT70395). Insert 2 FT1054 Bushings and a FT70393_6 Sleeve.



8. Install the new Driver side Diff drop onto the frame side pocket in the factory orientation using the factory hardware. Leave loose at this time. Install the supplied M14 x 60mm Allen bolts and washers along with FT70404 (Spacer Plate) between the new bracket and the diff.



9. Locate FT70396 (Passenger Side Diff drop bracket). Install (2) FT1054 (Bushings) & FT70393_6 (Sleeve) Into the new bracket.



10. Install the new passenger side diff bracket to the frame using the factory hardware. Leave loose at this time. Then, install the factory differential bolts through the diff and bracket. Install the supplied M16 nuts and washers.



- Torque the chassis to differential drop bracket hardware to 110 ft-lbs.
- Torque the driver side bracket to differential hardware to 110 ft-lbs.
- Torque the passenger side bracket to differential hardware to 145 ft lbs.

11. Install tires and wheels and torque lug nuts to wheel manufacturer's specifications.

12. Recheck all bolts for proper torque. **RE-TORQUE ALL NUTS, BOLTS AND LUGS AFTER 50 MILES AND PERIODICALLY THEREAFTER UNTIL TORQUE VALUES ARE RETAINED.**

13. Install Driver Warning Decal. Complete product registration card and mail to Fabtech in order to receive future safety and technical bulletins on this suspension.

14. Review all included warnings and warranties with consumer



For technical assistance call: **909-597-7800**

- Product Warranty & Warnings -

Fabtech provides a Limited Lifetime Warranty to the original retail purchaser who owns the vehicle, on which the product was originally installed, for defects in workmanship and materials.

The Limited Lifetime Warranty excludes the following Fabtech items; bushings, bump stops, ball joints, Uniball bearings, tie rod ends, limiting straps, cross shafts, heim joints and driveshafts. These parts are subject to wear and are not considered defective when worn. They are warranted for 60 days from the date of purchase for defects in workmanship.

Dirt Logic take apart shocks are considered a serviceable shock with a 1-year warranty against any manufacturer's defects. If a shock fails within the initial year of ownership, the owner must ship the shock to Fabtech for inspection and service. If after examination the shock is determined to have failed due to neglect, damage caused by improper installation, or any reason other than "normal wear and tear," the owner of the shock will be responsible for all service costs. Costs include labor, parts, and shipping. Service seal kits are available separately for future maintenance. All other shocks are covered under our Limited Lifetime Warranty.

Fabtech does not warrant any product for finish, alterations, modifications and/or installation contrary to Fabtech's instructions. Alterations to the finish of the parts including but not limited to painting, powder coating, plating and/or welding will void all warranties. Some finish damage may occur to parts during shipping, which is considered normal and is not covered under warranty.

Fabtech products are not designed nor intended to be installed on vehicles used in race applications or for racing purposes or for similar activities. This warranty does not include coverage for police, taxi, first responder vehicles, race vehicles, or vehicles used for government, commercial or fleet purposes. Also excluded from this warranty are sales outside of the United States of America.

Installation of most suspension products will raise the center of gravity of the vehicle and will cause the vehicle to handle differently than stock. It may increase the vehicle's susceptibility to a rollover, on road and off road, at all speeds. Extreme care should be taken to operate the vehicle safely at all times to prevent rollover or loss of control resulting in serious injury or death.

Oversized tires and wheels may decrease the vehicle's braking capacity. Drivers should always brake early and be aware of the increased the stopping distance of the vehicle. Drivers should adjust their driving habits to the effectiveness of the braking. Adjust your driving habits to these changes.

Failure to drive safely may result in serious injury or death to driver and passengers. Driver and passengers must ALWAYS wear your seat belts, avoid quick sharp turns and other sudden maneuvers